

Desk/3000series

Delivering the simplest and most reliable countertop payment experience



- Accept any payment methods
- Make NFC payment a seamless consumer experience
- Comply with the most stringent security requirements



ingenico



The Desk/3000 series offers a seamless payment experience. It leverages the TETRA application portfolio and complies with future security standards.



Optimized for payment

- Multiple alternative payment methods supported

Speeding up check-out with Desk/1600

- Saving space on the worktop and speeding up checkout

Maximized network availability:


- 3G, GPRS, Bluetooth, WiFi
- Ethernet

Highest security:

- Compliant with the latest global and local PCI regulations
- Optional PCI compliant privacy shield
- Kensington lock for safety

Supported by Ingenico's suite of services

- Fleet management & security solutions
- Hardware services
- Professional services

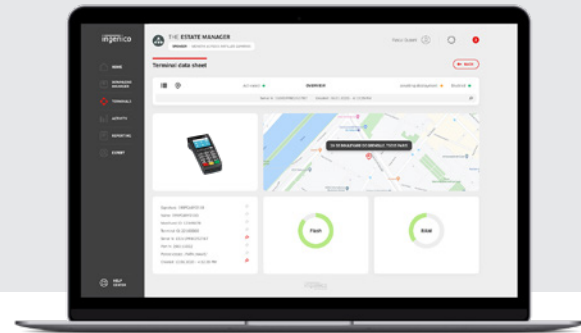

Processor	• Application & Crypto processor	• Cortex A5	✓
Memory	• Internal	• 128 MB Flash, 64 MB RAM • 256 MB Flash, 128 MB RAM	✓ Option
OS		• Telium TETRA	✓
SIM		• 2 SIM	Option
SAM		• 2 SAM • 3rd SAM	✓ Option
Card readers	• Magstripe • Smart card • Contactless	• ISO 1/2/3, 500K lifespan • EMV Level 1, 500K lifespan • EMV Contactless L1 3.0 spec compliant	✓ ✓ ✓
Display	• Monochrome • Colour	• 2.7" display, backlit, 128x64 pixels • 2.8" display, backlit, QVGA (320x240 pixels)	✓ ✓
Keypad		• 20 ergonomic keys, raised marking, backlit	✓
Audio	• Buzzer		✓
Thermal Printer	• Speed in lines/s • Paper roll cage	• 20 lines/s • 58 mm width x Ø 40 mm	✓ ✓

Terminal connectivity	• Wireless • Wired	• 3G • GSM/GPRS • Wi-Fi • Dial-up MODEM • Ethernet 10/100 base T	Option Option ✓ ✓
Terminal connections	• USB • Power Supply • Serial	• 1 USB Host • 1 USB Slave • Dedicated power Jack • 1 RS232 • 2nd RS232	✓ ✓ ✓ Option
Power supply		• 16W or 24W or 32W	✓
Terminal size		• 187x82x68 mm (7.3x2.6x3.2x2.6")	✓
Weight		• 340 g (12 oz)	✓
Environment	• Operating Temperature • Storage Temperature • Operating Humidity	• 0°C to +40°C (32°F to 104°F) • -20°C to +55°C (-4°F to 131°F) • 85% non-condensing at +40°C (104°F)	✓ ✓ ✓
Accessory	• Magic Box • Privacy shield	• 1xRS+ 1xPower+1xEth.+1xLine In • 2xRS+ 1xPower+1xEth.+1xLine In • Factory mounted • Field upgradable	Option Option Option Option
Security		• PCI PTS 5.x online & offline certified	✓



www.ingenico.com

ingenico