

Lane/3000

Enabling fast payments in lane



- Robust design for even the most demanding situations
- High-end keypad for a seamless PIN entry
- Easy to integrate at any lane and any retail kiosk
- Modular version to optimise total cost of ownership

ingenico



Designed to manage thousands of transactions per day, the Lane/3000 is a cutting-edge retail PIN Pad, ideal for busy retailers.



Optimized for payment

- All payment methods accepted

Highest security:

- PCI PTS v6
- Optional PCI compliant privacy shield
- Detection of abnormal cable removal to alert and inhibit the terminal in the case of threat
- Anti-theft Kensington lock

Easy integration into semi-attended kiosks, with optimized dimension and adaptation plate

1 form factor but 2 versions:


- A modular version with high-end upgradable features, including a camera, WiFi or Bluetooth accessibility
- A non-modular version focuses exclusively on processing EMV payments for multilane checkouts

Designed for an intensive use in retail:

- Heavy duty magnetic stripe
- Smartcard readers optimized to boost transaction speeds
- Clear contactless zone

Supported by Ingenico's suite of services

- Fleet management & security solutions
- Hardware services
- Professional services

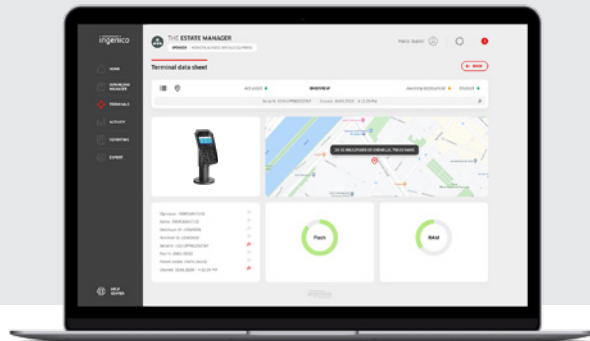

			MODULAR	NON-MODULAR
Processor	• Applications & Crypto Processor	• Cortex A5	✓	✓
Memory	• Internal • External	• 256 MB Flash, 128 MB RAM • Micro SD up to 32 GB	✓ Option	✓ N/A
OS		• Telium TETRA HTML5	✓	✓
SAM		• 1 • Up to 3	Option	Option
Card Reader(s)	• Magstripe • Second Magstripe (Dual Head) • Smart Card • Contactless	• ISO1/2/3, 500K reads lifespan • ISO1/2, 500K reads lifespan • EMV Level 1, 500K reads lifespan • EMV Level 1 3.0 spec compliant	✓ Option ✓ ✓	✓ N/A ✓ ✓
Camera		• 2M pixels (QR code library embedded)	Option	N/A
Display	• Colour	• 2.8" backlight, QVGA (320x240 pixels)	✓	✓
Touchscreen	• Capacitive	• Finger & stylus (1000K lifespan signature)	Option	Option
Keypad		• 15 keys, raised markings, backlit • 4 function keys (non-touch version)	✓ Option	✓ Option
Audio	• Buzzer • Audio Jack • Speaker	• Stereo • Mono	✓ Option Option	✓ Option Option

			MODULAR	NON-MODULAR
Terminal Connectivity	• Wired • Wireless	• Ethernet 10/100 base T • WiFi and Bluetooth	✓ Option	✓ N/A
Terminal Connections	• USB • Serial • Powered USB • Powered RS 232 • Powered Ethernet	• USB Host • USB Slave • 1 RS232 • 12 V (USB retail) • 12 V • PoE 802.3af compliant	✓ ✓ ✓ ✓ Option	✓ ✓ ✓ ✓ N/A
Stand Mounting		• Universal Payment Mount	✓	✓
Terminal Size		• 83 × 180 × 43 mm (3.26x7.08x1.69")	✓	✓
Weight		• 254 g (8.89oz)	✓	✓
Environment	• Operating temperature • Storage temperature • Relative humidity	• 0 to +50°C (32°F to 122°F) • -20 to +70°C (-4°F to 131°F) • 85% HR at +40°C (104°F)	✓ ✓ ✓	✓ ✓ ✓
Accessories	• Privacy shield (factory mouted) • Stylus kit	• PCI compliant	✓ Option	✓ Option
Security	• PCI PTS • Anti-removal • Anti-theft	• PCI PTS 6.x and 5.x certified • Active connector removal • Kensington lock receptacles • Secure mounts available	✓ ✓ ✓ Option	✓ ✓ ✓ Option



www.ingenico.com

