

Link/2500 companion

Flawless design for a clever payment companion



- Specifically engineered for flexibility to accept all payment methods including NFC/Contactless, Apple Pay and Samsung Pay
- Slim and robust, dedicated to mobility
- Shorten time to market by leveraging TELIUM applications into a smart companion



ingenico



When paired with an iOS/Windows tablet or a smartphone, Link/2500 Companion brings payment acceptance to any mobile point of sales.



Pocket-sized, light weight and robust design, the Link/2500 is the perfect business acceptance point

With Bluetooth, paired seamlessly with any iOS, Android or Windows-based tablet or smartphone

Multiple alternative payment methods supported


- EMV Chip & PIN, contactless, magstripe or digital wallets

Payment anywhere and anytime

Raising the bar on security with PCI PTS compliance

Supported by Ingenico's suite of services

- Fleet management & security solutions
- Hardware services
- Professional services

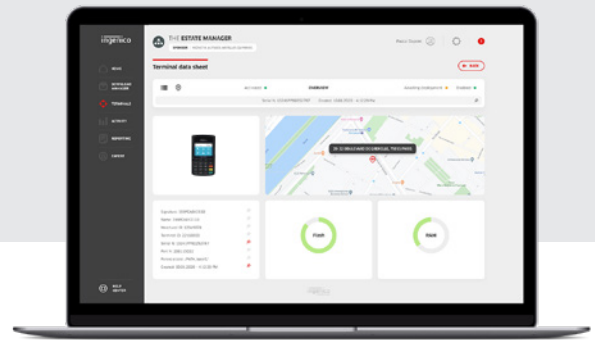

			LINK/2500 SLIM	LINK/2500 STANDARD
Processor	• Application & Crypto processor	• Cortex A5	✓	✓
Memory	• Internal	• 256 MB Flash, 128 MB RAM • 128 MB Flash, 128 MB RAM	Option	Option
OS		• Telium TETRA	✓	✓
SIM / SAM		• Up to 2	N/A	Option
Card readers	• Magstripe • Smart card • Contactless	• ISO 1/2/3, 100K lifespan • EMV Level 1, 50K lifespan • EMV / ISO14443	✓ ✓ ✓	✓ ✓ ✓
Display	• Colour	• 2.4" colour display, backlit, QVGA (240x320 pixels)	✓	✓
Keypad	• Mechanical	• 20 keys, raised marking	✓	✓
Audio	• Buzzer • Speaker		N/A	Option

			LINK/2500 SLIM	LINK/2500 STANDARD
Terminal connectivity	• LAN • Apple IAP Chip • Multicom	• Bluetooth • WiFi (Dual band) • All connectivities in one single device	✓ N/A Option N/A	Option Option Option Option
Terminal connections	• USB Type C	• Host & Slave (3K insertions)	✓	✓
Batteries	• Li-ion	• 1200mAH (removable) • 600mAH	N/A ✓	✓ N/A
Power supply	• Terminal	• 5V 1A	Option	Option
Terminal size	• L x W x H	• 129 x 70 x 13 mm (5.07 x 2.75 x 0.51) • 129 x 70 x 17 mm (5.07 x 2.75 x 0.67)	✓ N/A	N/A ✓
Weight	• Full featured	• 120g (4.23oz) • 155g (5.46oz)	✓ N/A	N/A ✓
Environment	• Charging Temperature • Operating Temperature • Storage Temperature • Operating Humidity	• 0°C to +40°C (32°F to 104°F) • -10°C to +50°C (14°F to 122°F) • -20 to +55°C (-4°F to 131°F) • 85% non-condensing at 40°C (104°F)	✓ ✓ ✓ ✓	✓ ✓ ✓ ✓
Accessory	• Cable	• USB A to USB C: 1.5m	✓	✓
Security		• PCI PTS 5.x online & offline certified	✓	✓



www.ingenico.com

ingenico