

Move/2500

Available whenever you need it



- Assure terminal availability rate if power and network fail
- Make NFC payment a seamless consumer experience
- Robust and functional to meet merchants' daily needs



ingenico



A seamless payment experience, through a compact portable terminal, complies with future security standards.



Compact design and ergonomic interface

Payment anywhere and anytime

- 4G, 3G, GPRS, Dual SIM, Bluetooth and WiFi

Multiple alternative payment methods supported

- EMV Chip & PIN, contactless, magstripe or digital wallets

Guaranteed terminal availability with a hybrid version included wired communication capabilities (Ethernet, PSTN)


Fast integrated printer

Long-lasting battery for the lengthy working day (2200mAh)

Raising the bar on security with PCI PTS compliancy

Supported by Ingenico's suite of services

- Fleet management & security solutions
- Hardware services
- Professional services

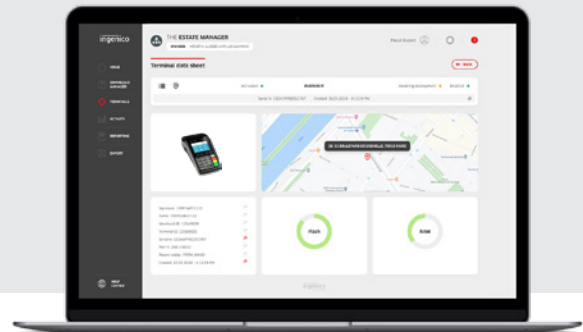

			MOVE/ 2500 HYBRID	MOVE/ 2500 PORT.
Processor	• Application & Crypto processor	• Cortex A5	✓	✓
Memory		• 256 MB Flash, 128 MB RAM • 512 MB Flash, 128 MB RAM	Option	Option
OS		• Telium TETRA	✓	✓
SIM		• 2 SIM	Option	Option
SAM		• 2 SAM • 3rd SAM	Option	Option
Card readers	• Magstripe • Smart card • NFC/Contactless	• ISO 1/2/3, 500K lifespan • EMV Level 1, 500K lifespan • EMV Level 1 compliant	✓ ✓ ✓	✓ ✓ ✓
Display	• Colour	• 2.4" backlit, QVGA (320x240 pixels)	✓	✓
Keypad		• 16 keys, raised marking, backlit • 4 Functional Keys without backlight	✓ ✓	✓ ✓
Audio	• Buzzer		✓	✓

			MOVE/ 2500 HYBRID	MOVE/ 2500 PORT.
Thermal Printer	• Speed in lines/s • Paper roll cage	• up to 24 lines/s • 58 mm width x Ø 40 mm	✓ ✓	✓ ✓
Terminal connectivity	• WAN • LAN • Wired	• 4G and/or 3G with fallback • WiFi • Dial-up Modem RJ45 • Ethernet 10/100 base T RJ45	Option Option Option	Option Option N/A
Terminal connections	• USB • Serial • Power Supply	• Micro USB Host & Slave • RS 232 RJ11 • Dedicated power jack	✓ ✓ ✓	✓ N/A ✓
Battery	• Li-ion	• 2200mAh	✓	✓
Terminal size	• Portable • Hybrid	• 168x81x58 mm (6.6x3.2x2.3") • 168x81x69 mm (6.6x3.2x2.7")	N/A ✓	✓ N/A
Weight	• Terminal + Battery	• 320 g (11 oz)	✓	✓
Environment	• Operating Temperature • Storage Temperature • Operating Humidity	• -10°C to +40°C (14°F to 104°F) • -20°C to +55°C (-4°F to 131°F) • 85% non-condensing at +40°C (104°F)	✓ ✓ ✓	✓ ✓ ✓
Security		• PCI PTS 5.x online & offline certified	✓	✓



www.ingenico.com

ingenico