


AXIUM EX8000

User Guide

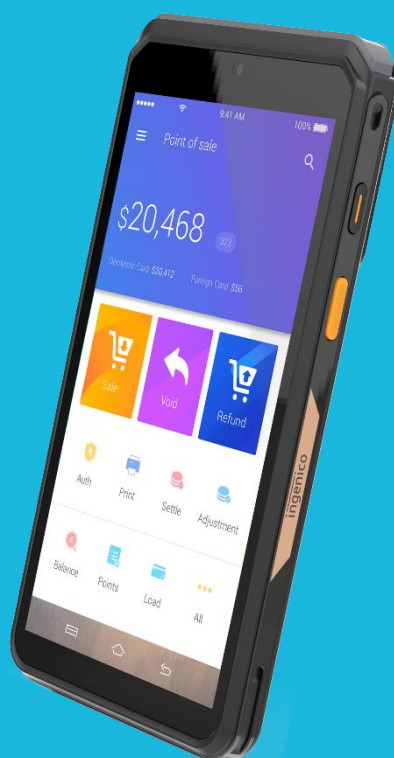

Terminal ready for
visual impaired people

www.ingenico.com

16 Place de L'Iris Tour Cb21 92400 Courbevoie - France

Banks and Acquirers International Holding, SAS / 814 767 216 RCS Nanterre

Contents

1. Introduction.....	4
2. Presentation	5
2.1 Content of the box	5
2.2 Overview of AXIUM EX8000	6
2.3 Key Locations and Functions.....	8
2.4 Touch Panel.....	9
3. Use of the terminal	9
3.1 Power on/Power off the terminal	9
3.2 Reading cards	10
3.3 Front scanner Usage	11
3.4 USB Type-C.....	12
4. Installation	12
4.1 Recommendations	12
4.2 Screen Protective film	13
4.3 Installing modules.....	13
4.4 Battery	16
4.5 Visual Impaired (VI) Accessory	17

5. Recommendations	18
5.1 Safety.....	18
5.2 Security of your terminal	20
5.3 Fixed installation.....	20
5.4 Cleaning the terminal.....	21
5.5 Transport and storage	22
6. Safety and Standards	22
7. Accessibility.....	30
8. RED-DA.....	31
9. Troubleshooting.....	31

1. Introduction

We hope that you will be fully satisfied with your new AXIUM EX8000 terminal.

Read this guide to understand and make the best use of your terminal. It presents you with the necessary information about use, installation, maintenance, safety and security recommendations.



WARRANTY/SECURITY/GARANTIE/SÉCURITÉ

Use only the power supply included with the product to ensure best performance and safety. Maintenance should only be provided by Ingenico authorized technician.

Failure to comply with these instructions will void the manufacturer's responsibility.

Afin d'assurer les meilleures performances et votre sécurité, utiliser seulement le bloc d'alimentation livré par le fabricant avec le produit. La maintenance doit être réalisée seulement par un technicien agréé et autorisé par Ingenico.

Le non-respect de ces instructions dégage la responsabilité du fabricant.



This symbol indicates an important warning.

Ce symbole indique un avertissement important.



This symbol indicates a piece of advice.

2. Presentation

2.1 Contents of the box

- AXIUM EX8000 terminal
- Power adapter
- A battery pack
- A safety guide



WARNING/ATTENTION

The power supply unit provided with your equipment is specially designed for INGENICO AXIUM EX8000 terminal. Do not use any other power supply and cable. The use of a power supply and cable with apparently similar voltage/current characteristics may damage your terminal.

Le bloc d'alimentation fournit avec votre équipement est spécialement conçu pour les terminaux de paiement Ingenico.

Ne pas utiliser d'autres sources d'alimentation. L'utilisation d'une alimentation électrique ayant des tensions et courant similaires peut endommager votre équipement.



ADVICE

Keep the package. It must be re-used whenever the terminal is shipped.

2.2 Overview of AXIUM EX8000



1) Front Camera

2) Volume keys

3) Scan key

4) LCD and touch screen

5) USB Type-C connector

6) Smart Card reader

7) Magnetic card reader

8) Bar code illumination light


9) Bar code scanner

10) Bar code scanner indicator light

11) Contactless landing zone

12) Power key

13) Scan key

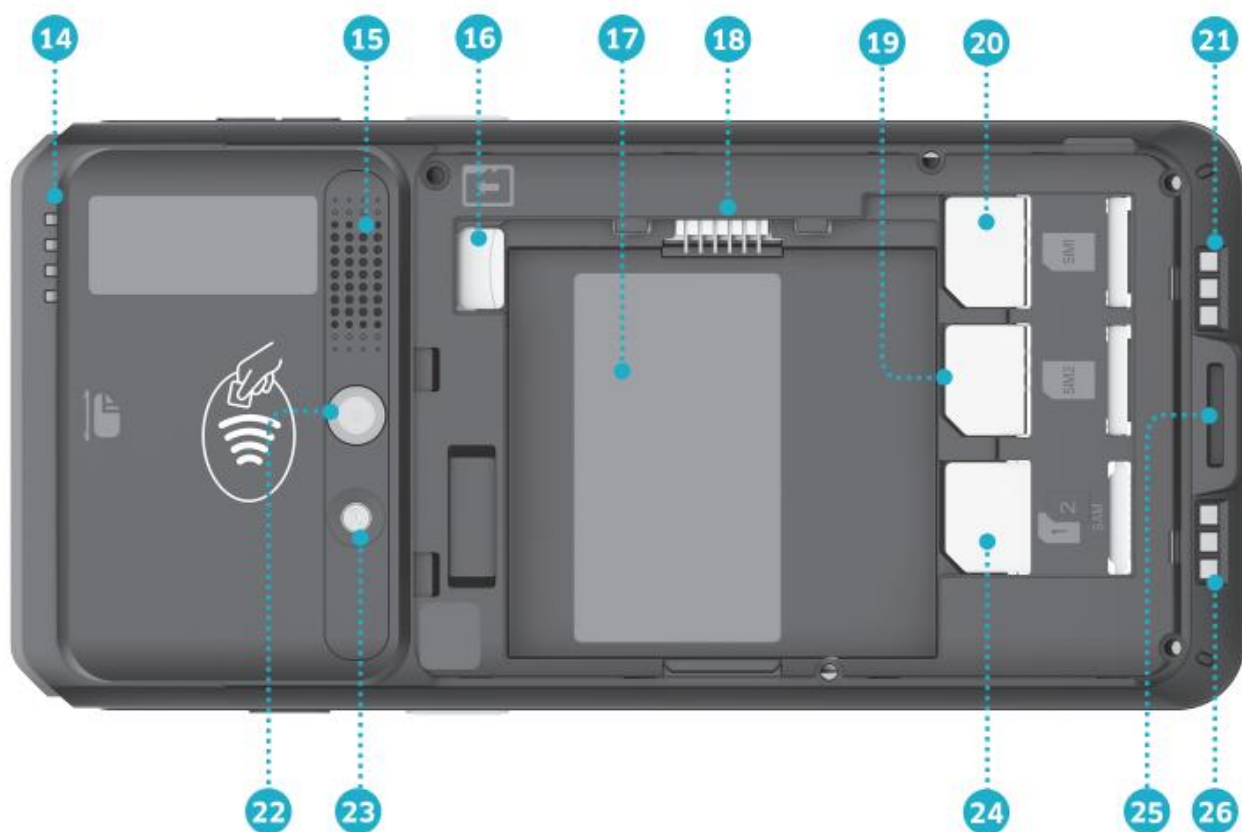

14) LEDs for contactless card

15) Speaker

16) Micro SD slot

17) Battery compartment

18) Battery socket

19) SIM 2 card slot

20) SIM 1 card slot

21) Base charging interface-

22) Rear camera

23) Flash

24) SAM card slot

25) Lanyard hole

26) Base charging interface+


Weight	290g (including battery)
Dimension (L x W x H)	170mm x 80.6mm x 19mm / 6.7 in x 3.17 in x 0.75 in
Electrical mains network	100-240VAC/50-60Hz Class II

2.3 Key Locations and Functions

Three physical keys on the left side of the terminal: a scan key and two volume keys.

Two physical keys on the right side of the terminal: a power button and a scan key.

Three virtual keys at the bottom of the 6-inch screen: Menu, Home and Back keys.

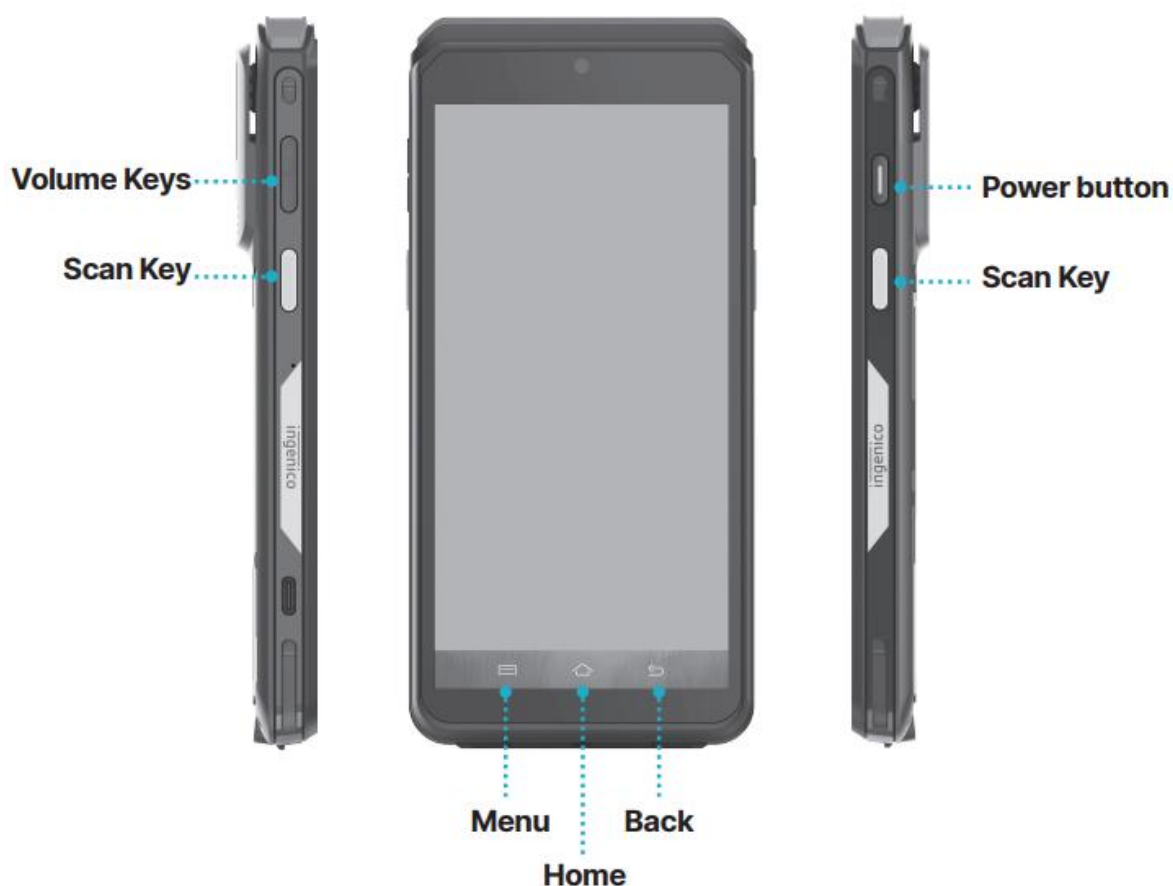

2.4 Touch Panel

The AXIUM EX8000 is equipped with touch panel that allows input via finger or with the use of a stylus.

3. Use of the terminal


3.1 Power on/Power off the terminal

Power On Terminal:

- Make sure the terminal battery is correctly installed.
- Press <Power> button for about 1s until the display is turned on.

Power Off Terminal:

- Press and hold <Power> button for more than 2s until the display shows the following menu.
- Press <Power off>.

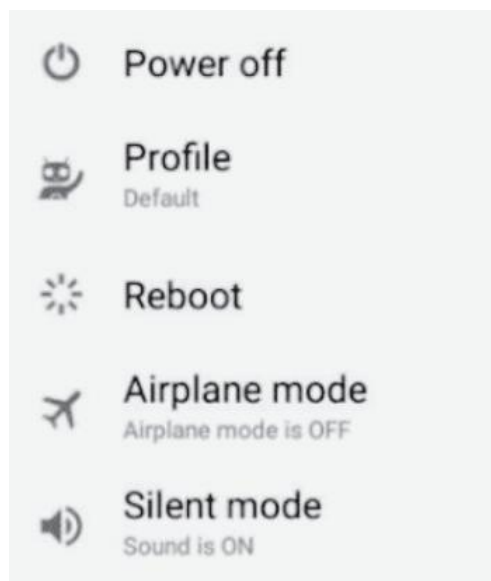

Battery Low:

- If the battery is empty, the terminal will automatically shut off.

Terminal restart:

- In the event of abnormal behavior of the terminal, press and hold the power button for 8 seconds to force the terminal to power off.


Screen saver mode:

- To conserve battery power, the screen may be turned off with a short press of the power button. (approximately 0.5 seconds).

3.2 Reading cards


Magnetic stripe card

- The card can be read bi-directionally, with the stripe facing the terminal.
- Use consistent swipe motion to ensure a reliable card reading.

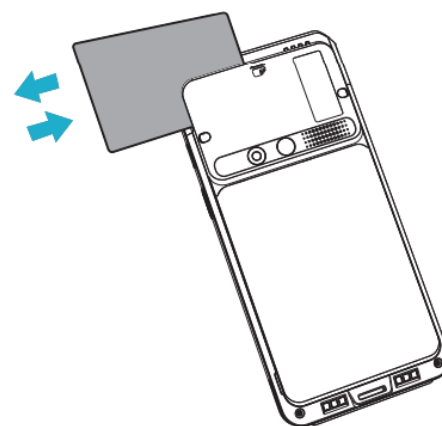


Contactless card

- Bring the card firmly up to the active zone.
- Keep the card close to the reader during the transaction.
- Do not remove the card until prompted by application or the LEDs indicate that the transaction has been completed.

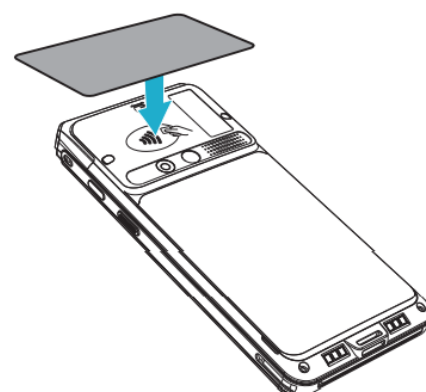


Smart card

- Insert the EMV card horizontally with the metal chip facing upward.
- Leave card in this position until the transaction is completed or prompted to remove it.

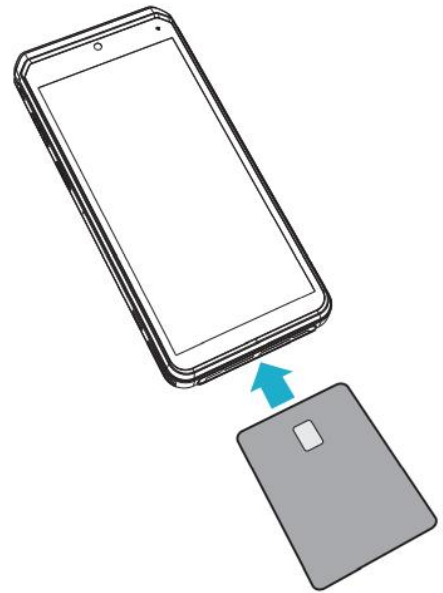

3.3 Front scanner Usage

- Press either scan button to start scanning.
- A red LED will be emitted from the window in front of the terminal.
- Align the red LED beam with the bar code to be scanned.
- A beep will sound when the barcode is successfully scanned.

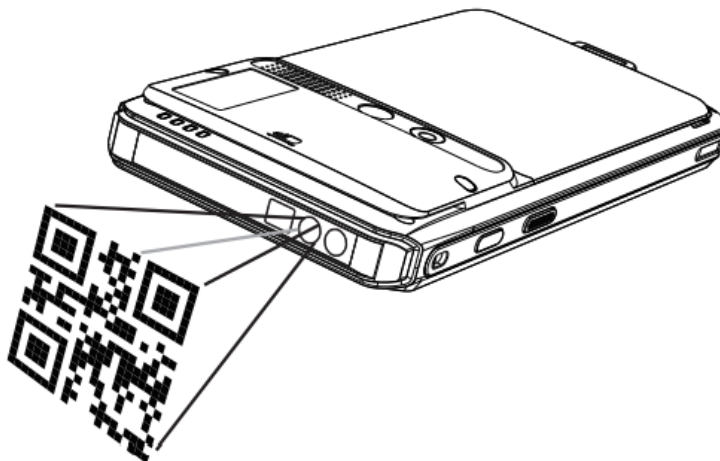

3.4 USB Type-C

- USB Type-C connector is located on the left side of the terminal.
- The connector manages Host and Slave connections.
- Connector is used for the audio Jack solution.



WARNING

To prevent possible hearing damage, do not listen at high volume levels for long periods.

4. Installation

4.1 Recommendations

Operating conditions

Ambient temperature*

From -10°C to +50°C (14°F to 122°F)

Max relative humidity

From 10% to 90%, Non-condensing

(*)Excluding battery charging

Battery charging conditions

Ambient temperature

From 0°C to +40°C (32°F to 104°F)

Storage conditions

Ambient temperature

From -20°C to +70°C (-4°F to 158°F)

Max relative humidity

From 5% to 90%, Non-condensing

4.2 Screen Protective film

Please remove the protective film from the display before use.



4.3 Installing modules

4.3.1 SAM1/SAM2/SIM1/SIM2




WARNING/ATTENTION





Switch off the terminal before opening the battery door.
Mettre hors tension le terminal avant d'ouvrir la trappe.

The SAM/SIM connectors are located inside the terminal, in a closed compartment.

- Turn the terminal and remove the battery door.

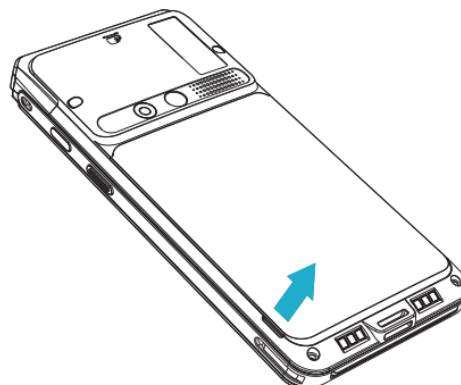

- SAM1, SAM2 and SIM1, SIM2 are identified by the engraved marks on the lower housing.
- When introducing a SAM/SIM into slot, be sure to put the cut corner as indicated on the picture.
- Close the battery door.





ADVICE

AXIUM EX8000 is equipped with a dual SAM slot.

When using two SAM cards, it is recommended to insert the bottom one first, then the top one.

When using only one SAM card, it is recommended to insert the lone SAM card into the SAM1 slot (bottom).



ADVICE

SIM and SAM cards share the same form factor, please ensure that the cards are inserted into the correct slot for the type of card.

4.3.2 MicroSD Memory Card



WARNING/ATTENTION



Switch off the terminal before opening the battery door.

Mettre hors tension le terminal avant d'ouvrir la trappe.

MicroSD connector is located inside the terminal, in a closed compartment.

- Turn the terminal and remove the battery door.
- MicroSD are identified by the engraved marks on the lower housing.
- Insert MicroSD card and push it to the end.
- Close the battery door.

NOTE: The terminal supports SDHC MicroSD cards up to 32GB.



4.4 Battery

4.4.1 Charging the battery

- For safety reasons, the battery included with the terminal is not fully charged. Please charge the battery before use.
- When used daily, the terminal charges its battery each time the power adapter is connected. Charging starts automatically.
- In order to charge the battery:
Using the power adapter
 - Connect the power adapter to the terminal USB type-C connector located on the left side of the terminal.
 - Connect the power adapter to the power supply mains network.
 - When charging, a red charge light at the top of the screen will display. This light will turn green when the terminal is fully charged" (check that behavior!).


4.4.2 Installing the battery



WARNING

Check that the terminal is not connected to the main electric network.
Ensure the terminal is powered off before connecting or disconnecting the battery to avoid damage.

- Power off terminal.
- Turn the terminal over and remove the battery door.
- Locate the battery pack connector beside the battery compartment.
- Plug the battery pack connector according to the connector locating system.
- Place the battery pack in its compartment.
- Replace the battery door.

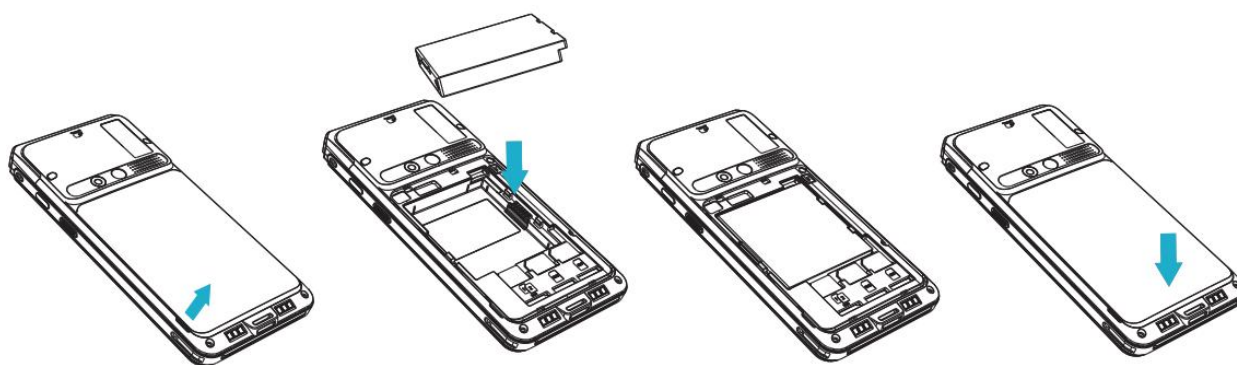

4.4.3 Handling of Battery Fires and Smoke

- **Disconnect and isolate:** If the device is charging, immediately unplug the PSU and turn it off. Move the device to an open area, away from flammable materials and people. Never touch smoking or burning equipment with your bare hands. Use insulated tools (such as dry wooden sticks) to avoid electric shock or burns.
- **Fire extinguishing:** Use a dry powder fire extinguisher or a carbon dioxide fire extinguisher to spray at the smoking area to extinguish the fire. You can also use a large amount of sand to cover the burning equipment.

4.5 Visual Impaired (VI) Accessory

Install ● slide the accessory onto the terminal from the bottom.	Remove ● slide the accessory down and away from the terminal

5. Recommendations

5.1 Safety

Lithium cell

The AXIUM EX8000 is fitted with an internal lithium cell which should only be accessed by a qualified technician.

Battery

- AXIUM EX8000 is fitted with battery specially designed for this terminal.
- Only use the approved power supplies, cables and batteries listed in the Ingenico's catalogue.
- Do not short-circuit the battery.
- Do not attempt to open the battery.
- Used batteries must be disposed of at the appropriate sites.
- For long-term storage: recharge the battery at least twice per year to avoid capacity loss and body deformation due to deep discharge. It is recommended to discard unused batteries sitting in stock for 3 years.
- The battery cover is part of the fireproof enclosure. It is necessary to ensure that the battery cover is on the product.

Examples that shall be considered include

- Replacement of a battery with an incorrect type that can defeat a safeguard (for example, in the case of some lithium battery types).
- Disposal of a battery into fire or a hot oven or mechanically crushing or cutting of a battery that can result in an explosion.
- Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas; and a battery subjected to extremely low air pressure that can result in an explosion or the leakage of flammable liquid or gas.

Battery lifespan depends on many factors including

- Features used.
- Number of charges and discharge cycles.
- Use temperature.

Signs that the battery should be replaced

- The battery fuel gauge / percentage meter drops randomly.

- Charging finishes prematurely even though the battery did not accept much power.
- Sudden capacity drops without warning.
- Self-discharge rate soars and is often uneven.
- The battery gets very hot during charging.
- The battery starts bulging.



CAUTION/ATTENTION

Risk of explosion battery is replaced by an incorrect type.
Dispose of used batteries according to the instructions.
RISQUE D'EXPLOSION LA BATTERIE EST REMPLACÉE PAR UN TYPE INCORRECT.
ÉLIMINEZ LES PILES UTILISÉES CONFORMÉMENT AUX INSTRUCTIONS.

SAM1/SAM2/SIM1/SIM2 Readers compartment

- The battery door for battery, SAM1/SAM2/SIM1/SIM2, readers located underneath the terminal, must be in place during the normal operation of the terminal.
- See sections "Installing modules" and "Installing the battery".

Tips for usage environment

- Avoid putting the terminal in direct sunlight, high temperature, moist, dusty or explosive and reduce or eliminate vibration and direct pressure.
- Keep the device and accessories out of reach of children.

On airplanes

- Your terminal must be switched off by removing the battery pack.
- Remove the battery from the terminal when on an airplane.
- Non-compliance with these safety rules may result in legal action and/or a ban on later access to cellular network services.

Explosion areas

- Some regulations restrict the use of radio equipment in chemical plants, fuel depots and any site where blasting is carried out.
- Operation near Fuel Pumps the terminal be protected by a specially fitted and certified cover enabling use in proximity to a fuel pump.

Thunderstorm weather

- According to some relevant reports, the mobile phone electromagnetic wave is good conductor of lightning.

- It is much easier to suffer lightning strikes when the damp atmosphere forms magnetic conductivity, especially in open areas.
- Do not use wireless terminals in thunderstorm weather.

Electronic health appliances

- The terminal is a radio transmitter which may interfere with health appliances, such as hearing aids, pacemakers, hospital equipment, etc.
- Your doctor or the equipment manufacturer will be able to provide you with appropriate advice.

5.2 Security of your terminal

This device conforms to currently applicable PCI PTS security requirements.

Upon receipt of the terminal, it is recommended to check for signs of tampering or other unauthorized modifications to the terminal. It is recommended to check the following periodically:

- The keypad is firmly in place.
- There is no evidence of unusual wires that have been connected to any ports on your terminal or associated equipment.
- Device does not display any notifications of being in a "tampered state".
 - In this state the terminal will repeatedly flash the message "Warning Detected" and further use of the terminal will not be possible.
 - If you observe the "Warning Detected" message, you should contact the terminal helpdesk immediately.

You are strongly advised to ensure that privileged access to your terminal is only granted to staff that have been independently verified as being trustworthy. The terminal must never be put in or left at a location where it could be stolen or replaced by another device.

5.3 Fixed installation

- Angled at 45 or more, so that oversight of the PIN entry from the rear of the device is not possible.
- Fitted in a swivel stand or fixed in the best possible position to prevent oversight of pin entry during use.

- There should be placement of conspicuous notices and educational material that informs the user to shield their PIN during PIN entry.
- The device must be installed so that oversight from other customers is prevented. This may be achieved through the placement of the lanes and device, so that the customer is automatically positioned between the device keypad and other customers. Alternatively, it may be achieved by the environment in which the device is installed, so that the checkout itself shields the PIN entry process.
- The terminal is recommended for indoor use only within the aforementioned environmental ranges in Section 4 of this document.

ADVICE

Positioning of the terminal on check stand must be in such a way to make cardholder PIN (Personal Identification Number) spying infeasible.

Installing device on an adjustable stand must be in such a way that consumers can swivel the terminal sideways and/or tilt it forwards/backwards to a position that makes visual observation of the PIN-entry process difficult.

Positioning of in-store security cameras such that the PIN- entry keypad is not visible.

NEVER ask the customer to divulge their PIN Code. Customers should be advised to ensure that they are not being overlooked when entering their PIN Code.



5.4 Cleaning the terminal

Good rules for proper cleaning of the terminal are:

- Unplug all wires from the terminal prior to cleaning.
- Apply soapy water or other approved cleaning product to a soft, non-abrasive cloth.
- Cleaning product should be applied to the cleaning cloth and not directly applied or sprayed to the terminal. Failure to follow this step may result in damage to the terminal.

- Do not clean the electrical connections.
- Do not use solvents, detergents or abrasive products: Those materials might damage the plastic or electrical contacts.
- Avoid prolonged exposure of the terminal to the direct rays of the sun.
- Do not put anything other than credit cards into the slot of the smart card reader.

5.5 Transport and storage

When transporting the terminal

- Protect the terminal from snow, rain, and excessive exposure to the sun.
- Transport with care to avoid mechanical impact.
- Do not throw the unit forcibly. Prevent the package from intrusion during transportation to avoid breakage. The product should be stored in the original packaging.
- Do not store in warehouses that also contain harmful gases, or inflammable, explosive, or corrosive chemicals.
- Do not expose to strong mechanical vibrations or strong magnetic fields.
- Packaging should be stored at least 15 cm above the ground and be kept away from heat, cold, windows, or air inlet sources by at least 50cm.
- Follow the specific stored conditions as noted in Section 4 of this document.

6. Safety and Standards

CE MARKING

The CE marking indicates AXIUM EX8000 complies with the requirements of European Directive 2014/53/EU on Radio Equipment for:

- The protection of the health and the safety of the user and any other person.
- The protection requirements with respect to electromagnetic compatibility.
- The protection requirements linked to network protection / protection of data and personal privacy / protection from fraud.

And comply with harmonized standards, as well as RoHS Directive 2011/65/EU and its amendment directives.

Operating Frequency Band (RF)

GSM B2: 1850–1910MHz (TX); 1930–1990MHz (RX)

GSM B3: 1710–1785MHz (TX); 1805–1880MHz (RX)

GSM B5: 824–849MHz (TX); 869–894MHz (RX)

GSM B8: 880–915MHz (TX); 925–960MHz (RX)

WCDMA B1: 1920–1980MHz (TX); 2110–2170MHz (RX)

WCDMA B2: 1850–1910MHz (TX); 1930–1990MHz (RX)
 WCDMA B5: 824–849MHz (TX); 869–894MHz (RX)
 WCDMA B8: 880–915MHz (TX); 925–960MHz (RX)
 LTE-FDD B1: 1920–1980MHz (TX); 2110–2170MHz (RX)
 LTE-FDD B3: 1710–1785MHz (TX); 1805–1880MHz (RX)
 LTE-FDD B5: 824–849MHz (TX); 869–894MHz (RX)
 LTE-FDD B7: 2500–2570MHz (TX); 2620–2690MHz (RX)
 LTE-FDD B8: 880–915MHz (TX); 925–960MHz (RX)
 LTE-FDD B20: 832–862MHz (TX); 791–821MHz (RX)
 LTE-FDD B28: 703–748MHz (TX); 758–803MHz (RX)
 LTE-TDD B38: 2570–2620MHz (TX/RX)
 LTE-TDD B40: 2300–2400MHz (TX/RX)
 LTE-TDD B41: 2496–2690MHz (TX/RX)

Wi-Fi: 2412–2472MHz; 5150–5850MHz (TX/RX)
 Bluetooth: 2402–2480MHz (TX/RX)
 RF ID: 13.56MHz (TX/RX)
 GPS: 1559–1610MHz (RX)
 GLONASS: 1559–1610MHz (RX)
 Beidou navigation: 1559–1610MHz (RX)

Max Of Transmit Power

FIBOCOM Module

EGSM850:32.5dBm (GMSK); 25.8dBm (8PSK)
 EGSM900:33.5dBm (GMSK); 27.5dBm (8PSK)
 DCS1800:30.5dBm (GMSK); 26.5dBm (8PSK)
 PCS1900:30.7dBm (GMSK);25.5dBm (8PSK)
 WCDMA Band1/2/5/8: 24dBm
 LTE Band1/Band3/Band5/Band7/Band8/Band20/Band28/Band38/Band40/Band41:24dBm
 Bluetooth:9.61dBm, BLE:0.11dBm
 2.4G Wi-Fi: 14.71dBm
 5.2G/5.3G/5.6G Wi-Fi:18.19dBm;
 5.8G Wi-Fi:12.85dBm

QUECTEL Module

EGSM850: 32.9dBm (GMSK); 26.5dBm (8PSK)
 EGSM900: 32.6dBm (GMSK); 27.5dBm (8PSK)
 DCS1800: 29.9dBm (GMSK); 26.5dBm (8PSK)
 PCS1900:30.4dBm (GMSK); 26.4dBm (8PSK)

WCDMA Band1/2/5/8: 23dBm

LTE Band1/Band3/Band5/Band7/Band8/Band20/Band28/Band38/Band40/Band41:24dBm

Bluetooth:10.26±2dBm, BLE:0.89±2dBm

2.4G Wi-Fi:16.53dBm

5.2G /5.3G/5.6G Wi-Fi:19.11dBm;

5.8G Wi-Fi:13.73dBm

NFC: 13.09dBμA/m@3m

Restrictions in the 5GHz band:

According to Article 10(10) of Directive 2014/53/EU, the packaging shows that this terminal will be subject to some restrictions when placed on the market.

In all EU member states, operations of 5150–5350MHz are restricted to indoor use only.



BE	BG	CZ	DK	DE	EE	IE	EL
ES	FR	HR	IT	CY	LV	LT	LU
HU	MT	NL	AT	PL	PT	RO	SI
SK	FI	SE	NO	IS	LI	CH	TR

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable

protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

SAR tests are conducted using standard operating positions accepted by the FCC with the device transmitting at its highest certified power level in all tested frequency bands, although the SAR is determined at the highest certified power level, the actual SAR level of the device while operating can be well below the maximum value. Before a new device is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the exposure limit established by the FCC. Tests for each device are performed in positions and locations as required by the FCC. For handheld worn operation, this device has been tested and meets the FCC RF exposure guidelines when used with an accessory designated for this product or when used with an accessory that contains no metal.

Non-compliance with the above restrictions may result in violation of RF exposure guidelines.

ISED RSS WARNING

This device complies with Innovation, Science and Economic Development Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'ISED applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Under Innovation, Science and Economic Development Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Innovation, Science and Economic Development Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that, the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Conformément à la réglementation ISED, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industry Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

SAR tests are conducted using standard operating positions accepted by the ISED with the device transmitting at its highest certified power level in all tested frequency bands, although the SAR is determined at the highest certified power level, the actual SAR level of the device while operating can be well below the maximum value. Before a new device is available for sale to the public, it must be tested and certified to the ISED that it does not exceed the exposure limit established by the ISED, tests for each device are performed in positions and locations as required by the ISED. For handheld worn operation, this device has been tested and meets the ISED RF exposure guidelines when used with an accessory designated for this product or when used with an accessory that contains no metal.

Non-compliance with the above restrictions may result in violation of RF exposure guidelines.

5GHz Wi-Fi should be used indoor only

Les tests SAR sont effectués à l'aide de positions d'exploitation standard acceptées par l'ISED avec la transmission de l'appareil à son niveau de puissance certifié le plus élevé dans toutes les bandes de fréquences testées, bien que le SAR soit déterminé au niveau de puissance certifié le plus élevé, le niveau SAR réel de l'appareil pendant l'exploitation peut être bien inférieur à la valeur maximale, avant qu'un nouvel appareil soit disponible à la vente au public, il doit être testé et certifié à l'ISED qu'il ne dépasse pas la limite d'exposition établie par l'ISED, les tests pour chaque appareil sont effectués dans des positions et des emplacements comme l'exige l'ISED. Pour les opérations à main, cet appareil a été testé et répond aux lignes directrices d'exposition aux RF de la cited lorsqu'il est utilisé avec un accessoire désigné pour ce produit ou lorsqu'il est utilisé avec un accessoire qui ne contient pas de métal. Le non-respect des restrictions ci-dessus peut entraîner une violation des lignes directrices sur l'exposition aux radiofréquences.

5 GHz band (W52, W53): Indoor use only

Bande de 5 GHz (W52, W53): utilisation à l'intérieur seulement

Environment (WEEE, Batteries and packaging)

This product is labeled in accordance with European Directives 2012/19/EU concerning Waste Electrical and Electronic Equipment (WEEE) and 2013/56/EC concerning Batteries and Accumulators. Those provisions are requiring producers and manufacturers to become liable for take-back, treatment and recycling upon end of life of equipment and batteries.

BATTERIES

If your product contains batteries, they must be disposed of at appropriate collection points.

THE PRODUCT



The cross-out waste bin stuck on the product or its accessories means that the product belongs to the family of electrical and electronic equipment, and waste batteries must not be thrown away but collected separately and recycled.

Please contact your retailers for more detailed information about the compliance solution in place for disposing of your old product and used batteries.

Packaging waste must also be collected separately to ensure proper disposal and recycling.

In this way you can participate in the re-use and upgrading of Electrical and Electronic Equipment Waste, which can influence the environment and human health.

Electrical power supply network

The electrical outlet must meet the following criteria:

- Use electrical outlets that are near the equipment and easily accessible.

The power supply label certification eighteen symbols:



CCC (China Compulsory Certificate) Mark



The Regulatory Compliance Mark (RCM)



International Efficiency Marking Protocol (Energy Star Level 6)



In door use only



"Conformite Europe enne" or CE Mark



Double insulation symbol



5 Years China RoHS symbol



10 Years China RoHS symbol



BSMI(Taiwan)



PSE Mark (Japan)



Recycle in accordance with the waste electronic & electrical equipment directive



Underwriters Laboratories Inc (US Compliance)



Made from recyclable material



Low density version of Polyethylene (LDPE)




Chlorinated Polyethylene (CPE)



Risk of explosion if the battery is incorrectly replaced or is placed in a fire



Dispose of batteries at a hazardous waste collection site or recycling facility



Direct Current

7. Accessibility

The product has been designed and manufactured in accordance with the essential accessibility requirements set out in Directive (EU) 2019/882 of the European Parliament and of the Council of 17 April 2019, in particular:

- The user interface is perceivable, operable, understandable, and robust.
- The device supports use by individuals with sensory, motor, or cognitive impairments.

Accessibility has been assessed and tested according to the following harmonized standard: EN 301 549: "Accessibility requirements for ICT products and services" in accordance with the provisions of the Directive (EU) 2019/882 coordination standards specified in Resolution C (2022) 6456

The assessment remains valid as long as the hardware and software integration – including all relevant applications – continues to comply with the requirements set forth by the applicable accessibility directive.

Any significant modifications to the system architecture, user interface, or compatibility with assistive technologies must be reassessed to ensure ongoing compliance.

Some models may need require an external accessory for audio assistance, please contact Ingenico support for more information (<https://www.ingenico.com>).

This user guide is intended for professional use only. Relevant personnel will receive specialized training prior to operation to ensure a full understanding of the operating procedures, safe usage, and proper functionality of the device.

The product is a Point of sales terminal. The intended use of the terminal is to proceed payment transaction. The end user will not have access all functionalities, he will only have access to the transaction acceptance: it means present card, enter pin and validate/check the payment transaction. For any operational questions, end users may contact on-site professionals for assistance.

Power & Scan buttons for professional use only.

8. RED-DA

The product has been designed and manufactured in accordance with the essential requirements of the RED DA (Radio Equipment Directive Delegated Act), as set out in Commission Delegated Regulation (EU) 2022/30 of 29 October 2021 supplementing Directive 2014/53/EU of the European Parliament and of the Council with regard to the application of the essential requirements referred to in Article 3(3), points (d), (e) and (f).

Article 3.3 (d): Network Protection

Article 3.3 (e): Data and Privacy Protection

Article 3.3 (f): Fraud Prevention

RED DA aspects have been assessed and tested in accordance with the harmonized standard EN 18031: "Common security requirements for radio equipment", ensuring alignment with the essential cybersecurity requirements of Directive 2014/53/EU. This applies to the relevant categories and classes of radio equipment as specified in Delegated Regulation (EU) 2022/30.

The assessment remains valid as long as the hardware and software integration – including all relevant applications – continues to comply with the requirements set forth by the applicable RED DA. Any additional software should follow RED DA requirements to remain EU compliant.

Please contact Ingenico support for more information (<https://www.ingenico.com>).

9. Troubleshooting

Q: The terminal cannot be started.

A: The device may be in a low energy status or an application running on the device may be in a defective state. Please ensure that the device is powered and then reset the device. If this still fails, please contact our customer service department for help.

Q: Transaction Processing Failure

A: Following reasons are likely to cause transaction failure: damaged magnetic card or smartcard SAM card, damaged card reader, improper operation of card swiping, damaged or unconnected, unconnected phone line, etc.

- Try to use more than one magnetic card to test the transaction, to confirm the failure is not caused by magnetic card.
- Make sure card swiping is operated correctly.
- Manually process the transaction instead of card reader. If manual transaction works, the failure may be caused by magnetic card readers.
- Use more than one smart card to test the transaction, to confirm the failure is not caused by smart card. Make sure the SAM card is correctly inserted into the card slot.
- Check if the SIM card is installed correctly and local wireless communication network functions or not.

If there is still problem, please contact our customer service center.

"INGENICO is a trademark of BANKS AND ACQUIRERS INTERNATIONAL HOLDING. This Document is Copyright © 2026 BANKS AND ACQUIRERS INTERNATIONAL HOLDING. BANKS AND ACQUIRERS INTERNATIONAL HOLDING retains full copyright ownership, rights and protection in all material contained in this document. The recipient can receive this document on the condition that he will keep the document confidential and will not use its contents in any form or by any means, except as agreed beforehand, without the prior written permission of BANKS AND ACQUIRERS INTERNATIONAL HOLDING. Moreover, nobody is authorized to place this document at the disposal of any third party without the prior written permission of BANKS AND ACQUIRERS INTERNATIONAL HOLDING. If such permission is granted, it will be subject to the condition that the recipient ensures that any other recipient of this document, or information contained therein, is held responsible to BANKS AND ACQUIRERS INTERNATIONAL HOLDING for the confidentiality of that information. Care has been taken to ensure that the content of this document is as accurate as possible. BANKS AND ACQUIRERS INTERNATIONAL HOLDING however declines any responsibility for inaccurate, incomplete or outdated information. The contents of this document may change from time to time without prior notice, and do not create, specify, modify or replace any new or prior contractual obligations agreed upon in writing between BANKS AND ACQUIRERS INTERNATIONAL HOLDING and the user. BANKS AND ACQUIRERS INTERNATIONAL HOLDING is not responsible for any use of this device, which would be non-consistent with the present document. All trademarks used in this document remain the property of their rightful owners."

www.ingenico.com

16 Place de L'Iris Tour Cb21 92400 Courbevoie - France

Banks and Acquirers International Holding, SAS / 814 767 216 RCS Nanterre