

Link/2500^{integration}

Clever payment companion
designed with integration in mind



- Specifically engineered for flexibility to accept all payment methods including NFC/Contactless, Apple Pay and Samsung Pay
- Shorten time to market by leveraging TELIUM applications into a smart companion
- Designed to facilitate the integration with a third party device



ingenico



Link/2500 Integration brings payment acceptance anywhere in the store.

Paired with any iOS, Android or Windows-based tablet or smartphone to accept payment anywhere, anytime


Designed for integration: lightweight, slim design, as well as mechanical and electronic integration to charge and communicate with a third-party device.

Compact yet robust

Raising the bar on security with PCI PTS compliancy

Supported by Ingenico's suite of services

- Fleet management & security solutions
- Hardware services
- Professional services

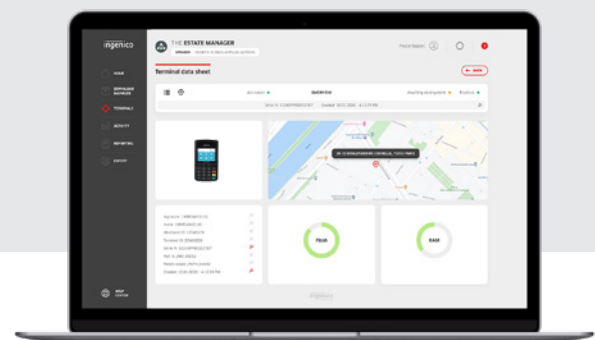

Processor	<ul style="list-style-type: none"> • Application & Crypto processor 	<ul style="list-style-type: none"> • Cortex A5 	✓
Memory	<ul style="list-style-type: none"> • Internal 	<ul style="list-style-type: none"> • 256 MB Flash, 128 MB RAM 	✓
OS		<ul style="list-style-type: none"> • Telium TETRA 	✓
Card readers	<ul style="list-style-type: none"> • Magstripe • Smart card • Contactless 	<ul style="list-style-type: none"> • ISO 1/2/3, 100K lifespan • EMV Level 1, 50K lifespan • EMV / ISO14443 	✓ ✓ ✓
Display	<ul style="list-style-type: none"> • Colour 	<ul style="list-style-type: none"> • 2.4" colour display, backlit, QVGA (240x320 pixels) 	✓
Keypad	<ul style="list-style-type: none"> • Mechanical 	<ul style="list-style-type: none"> • 20 keys, raised marking 	✓
Audio	<ul style="list-style-type: none"> • Buzzer 		✓

Terminal connectivity	<ul style="list-style-type: none"> • LAN • Apple IAP Chip 	<ul style="list-style-type: none"> • Bluetooth • Back connector for charging & USB data exchange • Certified MFI in BT & USB 	✓ ✓ ✓
Battery	<ul style="list-style-type: none"> • Li-ion 	<ul style="list-style-type: none"> • 600mAh 	✓
Terminal size	<ul style="list-style-type: none"> • L x W x H 	<ul style="list-style-type: none"> • 129x70x13 mm (5.07x2.75x0.51") 	✓
Weight	<ul style="list-style-type: none"> • Full featured 	<ul style="list-style-type: none"> • 120 g (5.46 oz) 	✓
Environment	<ul style="list-style-type: none"> • Charging Temperature • Operating Temperature • Storage Temperature • Operating Humidity 	<ul style="list-style-type: none"> • 0°C to +40°C (32°F to 104°F) • -10°C to +50°C (14°F to 122°F) • -20°C to +55°C (-4°F to 131°F) • 85% non-condensing at +40°C (104°F) 	✓ ✓ ✓ ✓
Security		<ul style="list-style-type: none"> • PCI PTS 5.x online & offline certified 	✓



www.ingenico.com

ingenico