

# Link/2500 integration

Clever payment companion  
designed with integration in mind



- Specifically engineered for flexibility to accept all payment methods including NFC/Contactless, Apple Pay and Google Pay
- Reduce time to market by leveraging Telium applications into a smart companion
- Designed to facilitate the integration with Ingenico's iCON Case and other third party devices



ingenico



When paired with an iOS/Windows tablet or a smartphone, Link/2500i (Integration) brings payment acceptance to any mobile point of sale.



**Highest security**

Link/2500i is PCI-PTS 5.x certified. Its Telium TETRA OS uses the latest cryptographic schemes with future-proof key length.

**All payment options**

In addition to EMV Chip & PIN and swipe, Link/2500i supports the broadest range of contactless standards allowing NFC couponing and wallet use cases.

**Designed for integration**

The Link/2500i is the ideal product to integrate payment into Ingenico's iCON Case and other third-party devices. It is lightweight, features a slim design, as well as mechanical and electronic integration to charge and communicate with a third party device.

**Seamless integration**


Link/2500i facilitates the in-store integration due to its agnosticity. The Link/2500i can be paired with any iOS, Android or Windows-based tablet or smartphone to convert it into a point of sale.

**User-friendly and intuitive interface**

Featuring a cutting edge design, the Link/2500i is user oriented with its bright 2.4" color display and a mechanical keypad.

**Compatible with Ingenico's suite of services**

Keeping the solutions connected, the Link/2500i works in unison with Ingenico's supporting service platforms, meaning merchants will have access to business services such as estate management reporting. Software updates and day-to-day support deliver a hassle-free experience.

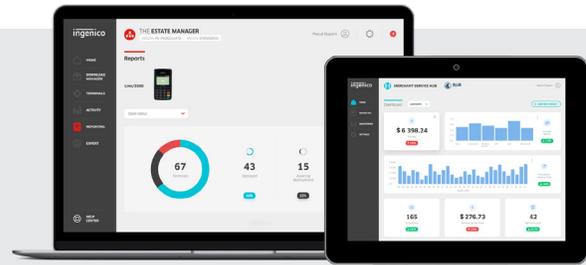

The Link/2500 Integration is supported by our Cloud Services

<b>Processor</b>	<ul style="list-style-type: none"> <li>Application &amp; Crypto processor</li> </ul>	<ul style="list-style-type: none"> <li>Cortex A5</li> </ul>	✓
<b>Memory</b>	<ul style="list-style-type: none"> <li>Internal</li> </ul>	<ul style="list-style-type: none"> <li>256 MB Flash, 128 MB RAM</li> </ul>	✓
<b>OS</b>		<ul style="list-style-type: none"> <li>Telium TETRA</li> </ul>	✓
<b>Card Readers</b>	<ul style="list-style-type: none"> <li>Magstripe</li> <li>Smart card</li> <li>Contactless</li> </ul>	<ul style="list-style-type: none"> <li>ISO 1/2/3, 100K lifespan</li> <li>EMV Level 1, 50K lifespan</li> <li>EMV / ISO14443</li> </ul>	✓ ✓ ✓
<b>Display</b>	<ul style="list-style-type: none"> <li>Color</li> </ul>	<ul style="list-style-type: none"> <li>2.4" colour display, backlit, QVGA (240x320 pixels)</li> </ul>	✓
<b>Keypad</b>	<ul style="list-style-type: none"> <li>Mechanical</li> </ul>	<ul style="list-style-type: none"> <li>20 keys, raised marking</li> </ul>	✓
<b>Audio</b>	<ul style="list-style-type: none"> <li>Buzzer</li> </ul>	<ul style="list-style-type: none"> <li>Up to 50dB, adjustable</li> </ul>	✓

<b>Terminal Connectivity</b>	<ul style="list-style-type: none"> <li>Bluetooth</li> <li>USB</li> </ul>	<ul style="list-style-type: none"> <li>Bluetooth 4.2 Class B</li> <li>Back connector for charging &amp; USB data exchange</li> <li>Certified MFI in BT &amp; USB</li> </ul>	✓ ✓ ✓
<b>Battery</b>	<ul style="list-style-type: none"> <li>Li-ion</li> </ul>	<ul style="list-style-type: none"> <li>600mAh</li> </ul>	✓
<b>Terminal Size</b>	<ul style="list-style-type: none"> <li>L x W x H</li> </ul>	<ul style="list-style-type: none"> <li>5.07x2.75x0.51" (129x70x13 mm)</li> </ul>	✓
<b>Weight</b>	<ul style="list-style-type: none"> <li>Full featured</li> </ul>	<ul style="list-style-type: none"> <li>5.46oz (120g)</li> </ul>	✓
<b>Environment</b>	<ul style="list-style-type: none"> <li>Charging Temperature</li> <li>Operating Temperature</li> <li>Storage Temperature</li> <li>Operating Humidity</li> </ul>	<ul style="list-style-type: none"> <li>32°F to 104°F (0°C to +40°C)</li> <li>14°F to 122°F (-10°C to +50°C)</li> <li>-4°F to 131°F (-20°C to +55°C)</li> <li>85% non-condensing at 104°F (+40°C)</li> </ul>	✓ ✓ ✓ ✓
<b>Accessories</b>	<ul style="list-style-type: none"> <li>iCON Case</li> </ul>		
<b>Security</b>		<ul style="list-style-type: none"> <li>PCI PTS 5.x online &amp; offline certified</li> </ul>	✓



www.ingenico.com

