

SELF/3000

Affordable solution for Vending, EV charging or Car wash self-service businesses



- Robust, sleek and space-saving design, easy to integrate indoor and outdoor
- All payment methods supported including NFC/ contactless, Magstripe and Chip without PIN
- Highest level of security certification and vending requirements compliance



ingenico



Contact and contactless payment solution, the Self/3000 series enables a flawless integration in your self-service business.



Accepts any payment methods:

- Contactless, Magstripe, EMV Chip, QR-code based payment
- NO PIN entry (NO CVM device)

Robust design IK10 / IP65 to facilitate intensive indoor or outdoor use cases

Ergonomic interface

- Easy-to-use customer interface
- Color display and two dedicated function buttons

Two versions available:

- Light: USB Slave and RS232 connectivity, a version to easily replace iUC285 installed base.
- Standard: Extended Connectivity options (USB Host, LAN port, MDB slave, Optional 4G add-on-box)


Easy integration:

- Can be integrated from outside or from inside the machine
- Self/3000 light: device is fully outside the kiosk - iUC285 plug and play
- Self/3000 standard: mostly of the device is outside the machine and need a custom cutout for integration
- Compliant with EVA EPS (Standard Door Module) standard for easier integration in any vending machine

Meets international security requirements with PCI PTS v6


Supported by Ingenico's suite of services

- Fleet management & security solutions
- Hardware services
- Professional services

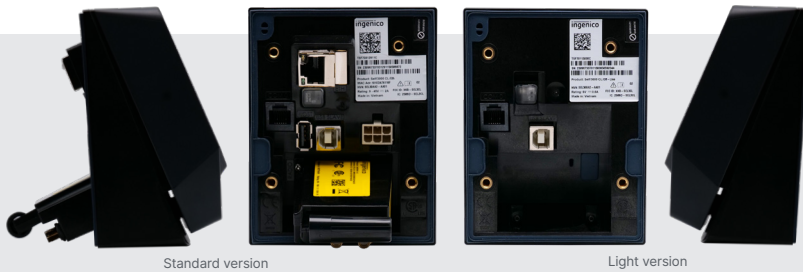

Standard version

Light version

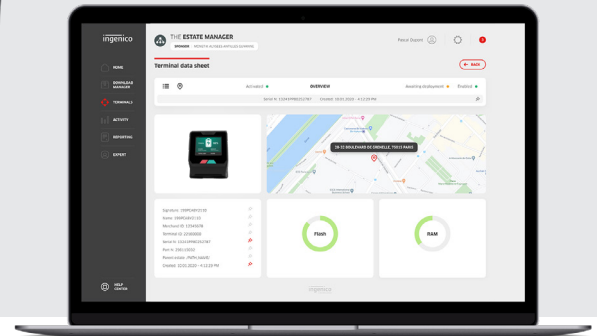

			Self/3000 Light	Self/3000 Standard
Platform	• Crypto & Application processor OS	• Low Energy platform • TETRA	✓	✓
Memory	• Internal	• 256 MB RAM / 256 MB Flash	✓	✓
Card reader(s)	• Contactless • Smart Card • Magstripe	• EMV Level 1 / ISO 1443 A/B/B' • EMV Level 1 / 500k reads lifespan • Shutter (plastic) • ISO 1/2/3, 500k reads lifespan	✓	✓
Display	• Color	• 2.4" - 320 x 240 - Non touch	✓	✓
User keys	• Mechanical	• 2 user keys (red key - green key)	✓	✓
Audio	• Buzzer	• Monotone	✓	✓
Terminal connections	• USB • Serial	• 1x USB Slave (USB-B connector) • 1x USB Host (USB-A connector) • 1x RS232 (1x RJ11) • 1x MDB Slave (Molex 6 points)	✓ N/A N/A	✓ ✓ ✓ ✓
Connectivity	• Ethernet 10/100 • Wireless	• 1x RJ 45 • 4G with fallback 3G (Add-on box)	N/A N/A	✓ Option
Power supply	• Thru USB • External power supply	• 5V DC - Thru USB connector • Light sleep / Deep sleep modes • 9-45V DC - Thru MDB connector	✓ N/A	N/A ✓ ✓

			Self/3000 Light	Self/3000 Standard
Terminal size	• EVA EPS v2 • Overall W x H x D mm	• Standard Door Module (SDM) • 85 x 106,8 x 69,9 mm (3.35 x 4.2 x 2.75")	✓	✓
Terminal mounting	• From outside the kiosk • From inside the kiosk	• Without EVA EPS mounting plate • iUC285 compatible - same points of fixation • With EVA EPS mounting plate	✓ ✓	✓ Option
Weight		• 331 gr (11.7 oz) • 318 gr (11.2 oz)	N/A ✓	✓ N/A
Environment	• Operating Temperature • Storage Temperature • Operating Humidity non-condensing	• -25°C to +70°C (-13°F to 158°F) • -30°C to +70°C (-22°F to 158°F) • 95% non-condensing at +55°C (131°F)	✓ ✓ ✓	✓ ✓ ✓
IP	• Ingress protection	• IP 65	✓	✓
IK	• Shock protection	• IK 10	✓	✓
Security		• PCI PTS 6.x certified	✓	✓
Accessories		• EVA EPS mounting plate • USB cables, SERIAL cables... • UCI module (I/O management) • 4G add-on box • PSU 12V DC...	Option Option N/A N/A N/A	Option Option Option Option Option



www.ingenico.com

ingenico