


Desk/1700

Provide customers with autonomy and security at the check-out



- Connect easily to the AXIUM DX4000 Desktop allowing a smart and unified consumer-facing solution
- Manage customer interface for any type of payment at the latest standards
- Integrate with any counter space thanks to a compact and sleek design

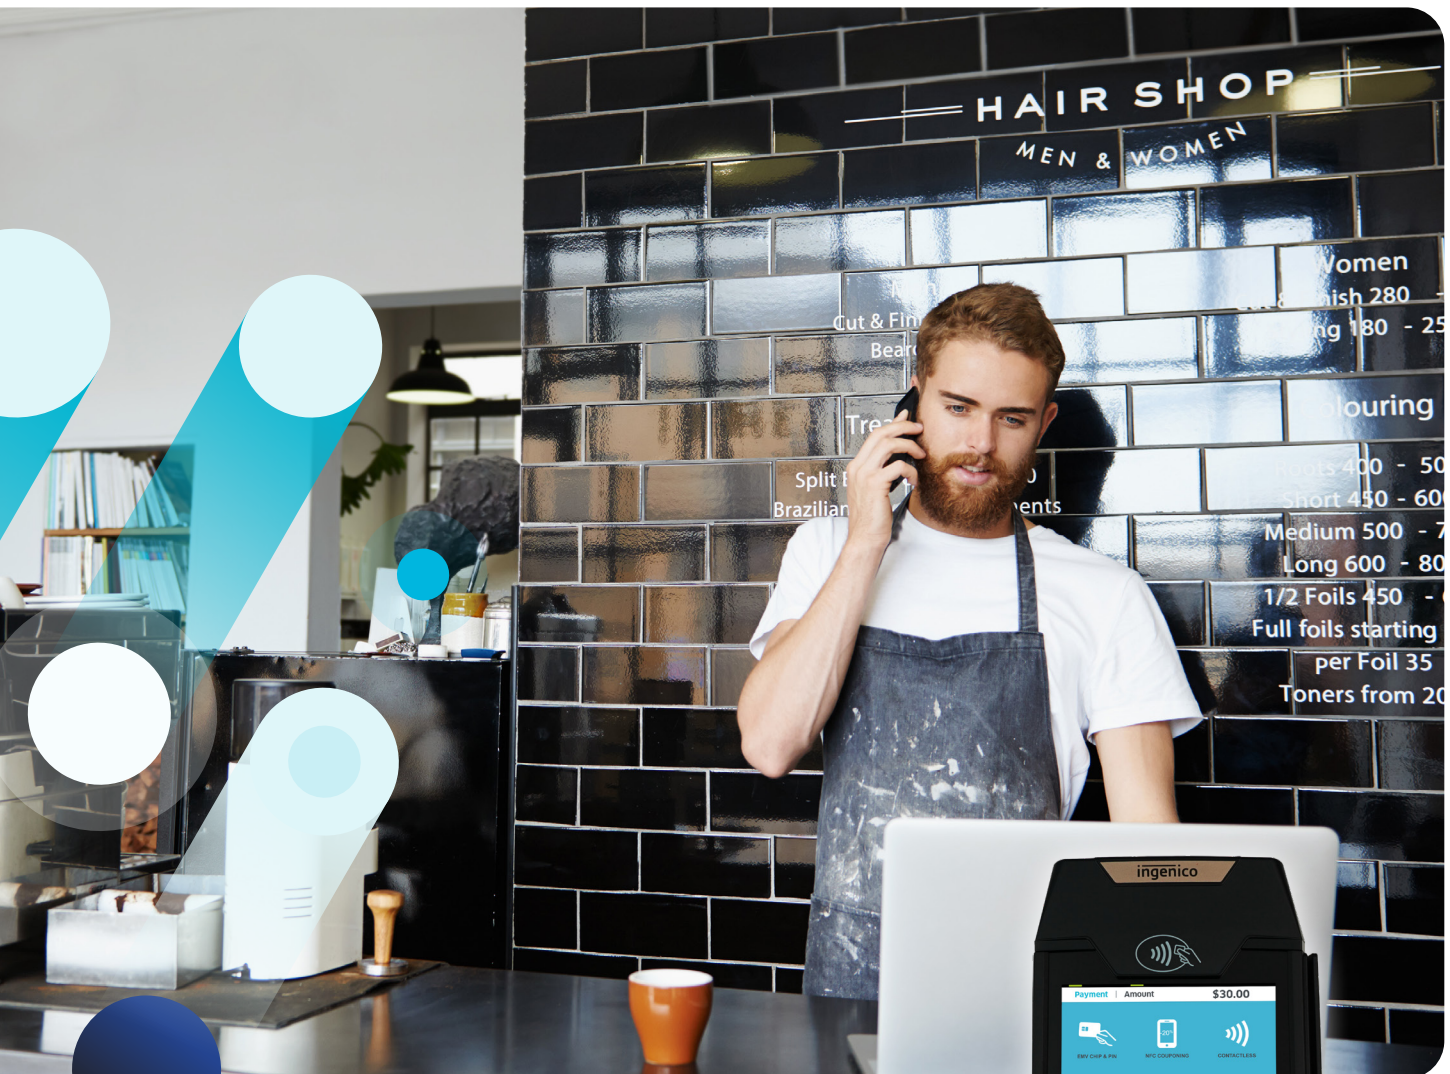



Easy to integrate into any counter-space and reliable, the Desk/1700 is an intuitive PIN Pad speeding customers through check-out.



Optimized for payment

- All payment methods accepted
- An easy-to-identify contactless reader
- A large keypad for a seamless the PIN entry

Easy connectivity to AXIUM DX4000 Desktop thanks to one single connector

Robust and reliable device

- Display with glass lens
- High-performance card & swipe insertion


Compact design to fit easily on any counter

Highest security

- PCI PTS v6
- Optional PCI compliant privacy shield

Supported by Ingenico's suite of service

- Fleet management & security solutions
- Hardware services
- Professional services

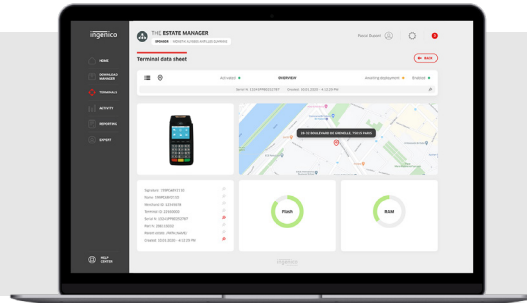

Processor	• Application & Crypto processor	• Cortex A7	✓
Memory	• Internal	• 256 MB Flash, 128 MB RAM	✓
OS		• Telium TETRA	✓
Card Reader(s)	• Magnetic card reader	• ISO 1/2/3 (500K reads lifespan bi-directional swiping)	✓
	• Smart Card	• EMV L1 (500K reads lifespan)	✓
	• Contactless	• EMV Contactless L1 3.0 spec compliant	✓
Display		• 2.8"backlight, glass lens, QVGA (320×240 pixels)	✓
Keypad	• Physical keys	• 15 keys, raised markings, backlit	✓
		• 4 function keys	✓
Audio	• Buzzer		✓
Security	• PCI PTS	• PCI PTS V6 compliant	✓
	• Anti-removal	• Active connector removal	✓
	• Anti-theft	• Kensington lock receptacle	✓

Terminal Connections		• Connects to AXIUM DX4000	✓
Terminal Connections	• IDMI	• USB 5V on Magic Box	✓
Stand Mounting	• Universal Payment Mount		✓
Privacy PIN shield	• Standard privacy shield	• PCI compliant (factory mounted)	Option
Terminal Size	• Terminal only	6.6×3.2×1.6" (167×82×40mm)	✓
Terminal Weight		• 8.1oz (231g)	✓
Environment	• Operating temperature	• 32°F to 122°F (0 to +45°C)	✓
	• Storage temperature	• -4°F to 158°F (-20 to +55°C)	✓
	• Relative humidity	• 85% HR at +104°F (40°C)	✓

