

AXIUM DX4000 Portable

Seamless checkout on the spot





Always running at peak performance, fully connected, AXIUM DX4000 Portable meets merchant's daily needs.

The power of Android 10. Harness the power of the Appstore.

Performance optimized at affordable price

Payment anywhere and anytime (4G, 3G, GPRS, Bluetooth and WiFi)


All methods of payment accepted (EMV Chip & PIN, contactless, magstripe or digital wallets and QR-code based payment)

Fast integrated printer

Long-lasting battery for the lengthy working day (2200mAh, 15.8Wh)

Raising the bar on security with PCI PTS v6 and Ingenico security tools

Fully outsourcing of terminal's life cycle management with TaaS package

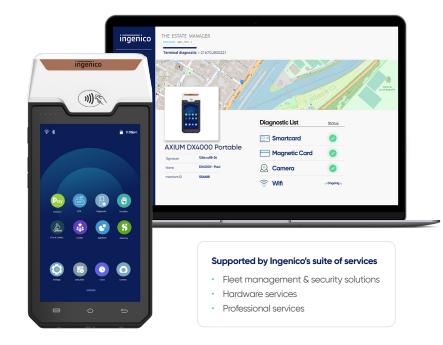

Specifications

OS	• Android	Android 10 Security OS	~
Memory	• Internal	8GB Flash 1GB RAM	~
	External	MicroSD Card slot	~
Processor	Application processor	Cortex Quad-core A53, 1.4GHz	~
	Crypto processor	Security core SC300, 192MHz	~
Card readers	Magnetic card reader	Support ISO 1/2/3 track data, bi-directional swiping	~
	Smart card reader	EMV L1 and support ISO7816	~
	NFC/contactless	EMV Contactless L1 3.1 certified; support ISO / IEC 14443 Type A / B	~
SAM / SIM	• 3 slots (SAM + SIM)	• 2 SIM + 1 SAM	~
slots		• 1 SIM + 2 SAM	Option
Display	Color / capacitive multi-touch	• 5", 854 x 480 px	~
Printer	Integrated thermal printer	Diameter: 40mm	~
Keys & Keypad	Power key & volumes keys	1 Power key & 2 volumes keys	~
кеурии	Capacitive screen keys	Physical screen keys: Menu, Home, Back	~

Audio	SpeakerBuzzerMicrophone	Internal speaker Internal buzzer Internal microphone	y Option
Connectivity	• WAN • LAN	 4G fallback 3G and GPRS Bluetooth 4.2 support BLE WiFi IEEE8.2.11 a/b/g/n 2.4GHz 	· · · · · · · · · · · · · · · · · · ·
Connections	• USB	• USB Type C	~
Data capture	 Positionning 	Tracking GPS, GLONASS, BEIDOU	~
	Rear camera	0.3MP, fixed focus, fill light, code scanning	~
Battery	• Li-ion	 2200mAh / 7.2V, 15.8Wh (equal to 4270mAh / 3.7V) 	~
Size	Terminal only	• 177.6 x 80 x 56.5 mm (6.63 x 3.15 x 2.22")	~
Weight	• Terminal + battery	• 430g (15.17oz)	~
Security	• PCI	PCI PTS V6 certified	~
Environment	 Operating Temperature Storage Temperature Operating 	10°C to +50°C (14°F to 122°F) 20°C to +70°C (-4°F to 158°F) - 10% to 90%	· ·
	Humidity	non-condensing	

