

ingenico

# LINK/2500 Companion

Flawless design for a clever  
payment companion



- Specifically engineered for flexibility to accept all payment methods including NFC/Contactless, Apple Pay and Samsung Pay
- Slim and robust, dedicated to mobility
- Shorten time to market by leveraging TELIUM applications into a smart companion



When paired with an iOS/Windows tablet or a smartphone, Link/2500 Companion brings payment acceptance to any mobile point of sales.

Pocket-sized, light weight and robust design, the Link/2500 is the perfect business acceptance point


With Bluetooth, paired seamlessly with any iOS, Android or Windows-based tablet or smartphone

Multiple alternative payment methods supported

- EMV Chip & PIN, contactless, magstripe or digital wallets

Payment anywhere and anytime

Raising the bar on security with PCI PTS certification

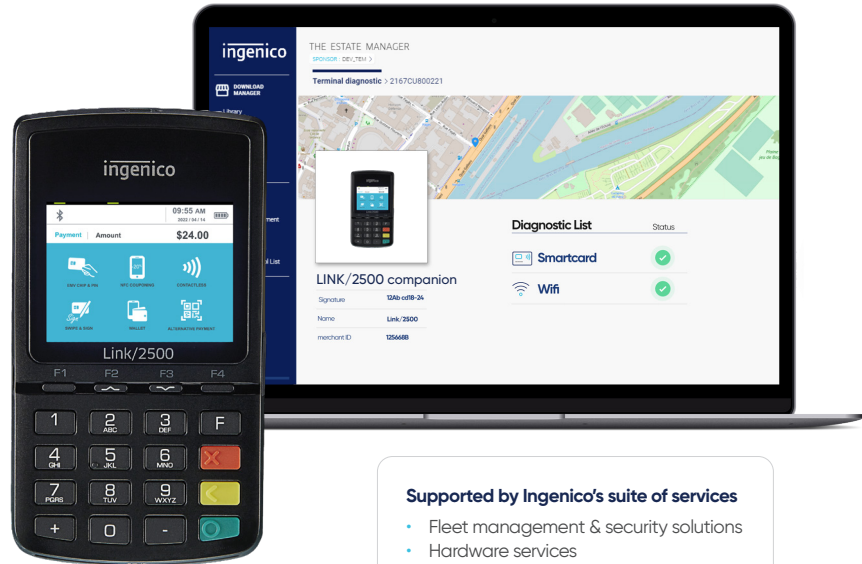

#### Supported by Ingenico's suite of services

- Fleet management & security solutions
- Hardware services
- Professional services

## Specifications

			LINK/ 2500 SLIM	LINK/ 2500 STANDARD				LINK/ 2500 SLIM	LINK/ 2500 STANDARD
OS		• Telium TETRA	✓	✓	Terminal Connections	• USB Type C	• Host & Slave (3K insertions)	✓	✓
Memory	• Internal	• 256 MB Flash, 128 MB RAM	✓	✓	Terminal size	• L x W x H	• 129 x 70 x 13 mm (5.07 x 2.75 x 0.51")	✓	N/A
		• 128 MB Flash, 128 MB RAM	Option	Option			• 129 x 70 x 17 mm (5.07 x 2.75 x 0.67")	N/A	✓
Processor	• Application & Crypto processor	• Cortex A5	✓	✓	Power supply	• Terminal	• 5V 1A	Option	Option
Card readers	• Magstripe • Smart Card • Contactless	• ISO 1/2/3, 100K lifespan	✓	✓	Batteries	• Li-ion	• 1200mAh (removable)	N/A	✓
		• EMV Level 1, 50K lifespan	✓	✓			• 600mAh	✓	N/A
SIM / SAM		• up to 2	N/A	Option	Weight	• Full featured	• 120g (4.23oz) • 155g (5.46oz)	✓ N/A	N/A ✓
Display	• Colour	• 2.4" colour display, backlit, QVGA (240x320 pixels)	✓	✓	Security		• PCI PTS 5.x online & offline certified	✓	✓
Keypad	• Mechanical	• 20 keys, raised marking	✓	✓	Environment	• Charging Temperature • Operating Temperature • Storage Temperature • Operating Humidity	• 0°C to +40°C (32°F to 104°F) • -10°C to +50°C (14°F to 122°F) • -20 to +55°C (-4°F to 131°F) • 85% non-condensing at 40°C (104°F)	✓ ✓ ✓ ✓	✓ ✓ ✓ ✓
Audio	• Buzzer • Speaker		✓ N/A	✓ Option					
Terminal Connectivity	• LAN	• Bluetooth	✓	Option	Accessory	• Cable	• USB A to USB C: 1.5m	✓	✓
	• Apple IAP Chip • Multicom	• WiFi (Dual band)  • All connectivities in one single device	N/A Option N/A	Option Option Option					

