ingenico

LINK/2500

Your smart, sleek and simple payments solution





The Link/2500 brings payment acceptance solution to any mobile business.

Pocket-sized, light weight and robust design, the Link/2500 is the perfect business acceptance point

Payments anywhere and anytime

• 4G, 3G, GPRS, Dual SIM, Bluetooth and WiFi

Raising the bar on security with PCI PTS certification


Designed for accessibility:

- Integrated speaker which could provide vocal assistance
- · Real mechanical keypad with raised marking

Multiple alternative payment methods supported

 EMV Chip & PIN, contactless, magstripe or digital wallets

Optimized battery for a long business day on the go (up to 1200mAh)

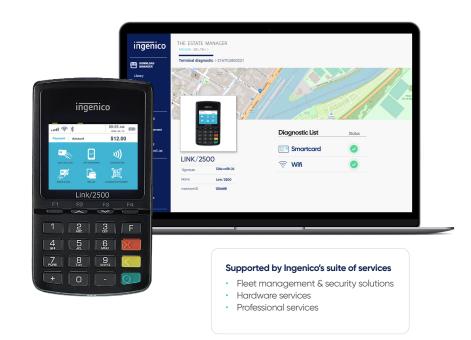

Specifications

			LINK/ 2500	LINK/ 2500 TOUCH				LINK/ 2500	LINK/ 2500 TOUCH
os		Telium TETRA	~	~	Terminal Connectivity	WAN LAN Apple IAP Chip Multicom	4G and/or 3G with fallback; Dual SIM Bluetooth WiFi (Dual band) All connectivities	Option	Option
Memory	• Internal	 256 MB Flash, 128 MB RAM 128 MB Flash, 128 MB RAM 	Option	Option				Option Option Option	Option Option Option Option
Processor	 Application & Crypto processor 	Cortex A5	~	~	Terminal size	• LxWxH	in one single device • 129 x 70 x 17 mm	· ·	N/A
Card readers	MagstripeSmart Card	 ISO 1/2/3, 500K lifespan EMV Level 1, 50K lifespan 	~	· ·			(5.07 x 2.75 x 0.67) • 129 x 70 x 18 mm (5.07 x 2.75 x 0.70)	N/A	~
	 Contactless 	• EMV / iSO14443	~	~	Power supply	Terminal	• 5V 1A	Option	Option
SIM / SAM		• up to 2	Option		Battery	• Li-ion	• 1200mAh (removable)	~	~
Display	• Colour	 2.4" colour display, backlit, QVGA (240x320 pixels) 	~	~	Weight	Full featured	155 g (5.46 oz)167 g (5.89 oz)	N/A	N/A
Keypad	Mechanical	20 keys, raised markingBacklighted keypad	N/A	Option	Security		PCI PTS 5.x online & offline certified	~	~
Audio	BuzzerSpeaker	Stereo Mono	✓ Option	✓ Option	Environment	Charging Temperature Operating Temperature Storage Temperature Operating Humidity	O°C to +40°C (32°F to 104°F) -10°C to +50°C (-14°F to 122°F) -20°C to +55°C (-4°F to 131°F) 85% non-condensing at +40°C (104°F)	~	~
Accessory	• Cable	USB A to USB C: 1.5m	~	~				~	~
Terminal connections	• USB Type C	Host & Slave	~	~				~	~