ingenico

LINK/2500 Integration

Clever payment companion designed with integration in mind






Link/2500 Integration brings payment acceptance anywhere in the store.

Paired with any iOS, Android or Windows-based tablet or smartphone to accept payment anywhere, anytime

Designed for integration: lightweight, slim design, as well as mechanical and electronic integration to charge and communicate with a third-party device.

Compact yet robust

Raising the bar on security with PCI PTS compliancy

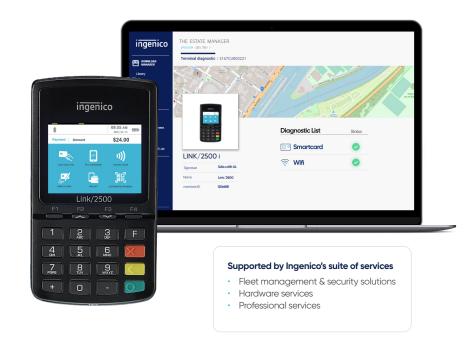

Specifications

os		Telium TETRA	~
Memory	• Internal	• 256 MB Flash, 128 MB RAM	~
Processor	 Application & Crypto processor 	Cortex A5	~
Card readers	MagstripeSmart CardContactless	ISO 1/2/3, 100K lifespan EMV Level 1, 50K lifespan EMV / iSO14443	· ·
Display	• Colour	 2.4" colour display, backlit,QVGA (240x320 pixels) 	~
Keypad	Mechanical	20 keys, raised marking	~
Audio	• Buzzer		~

Terminal Connectivity	LAN Apple IAP Chip	Bluetooth Back connector for charging USB data exchange Certified MFI in BT & USB	· ·
Terminal size	• LxWxH	• 129x70x13 mm (5.07x2.75x0.51")	~
Battery	• Li-ion	• 600mAh	~
Weight	Full featured	• 120 g (5.46 oz)	~
Security		• PCI PTS 5.x online & offline certified	~
Environment	Charging Temperature Operating Temperature Storage Temperature Operating Humidity	 0°C to +40°C (32°F to 104°F) -10°C to +50°C (14°F to 122°F) -20°C to +55°C (-4°F to 131°F) 85% non-condensing at +40°C (104°F) 	· · · · · · · · · · · · · · · · · · ·