ingenico

MOVE/5000

The perfect companion for mobile businesses, indoors and out





Designed for hospitality, high street and small merchants, the Move/5000 enables a seamless shopping experience that's free from the checkout.

3.5" color touchscreen and ergonomic interface

Payments anywhere and anytime

• 4G, 3G, GPRS, Dual SIM, Bluetooth and WiFi

All methods of payment accepted

 EMV Chip & PIN, contactless, magstripe or digital wallets and QR-code based payments


Fast integrated printer

Raising the bar on security with PCI PTS V6

Powerful high-end optional features

- 1D/2D barcode scanner
- 5M rear camera (up to 8MP)

Long-lasting battery for the lengthy working day (2900mAh)

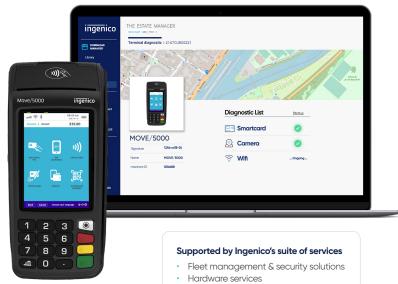

Professional services

Specifications

| OS | | Telium TETRA | ~ |
|--------------|--|--|----------------------------|
| Memory | InternalExternal | 512 MB Flash, 512 MB RAMMicroSD up to 32GB | × × |
| Processor | Application & Crypto processor | Cortex A5 | ~ |
| Card readers | MagstripeSmart cardNFC/Contactless | ISO 1/2/3, 500K lifespan EMV Level 1, 500K lifespan EMV Contactless L1 3.0 certified | * * * |
| SIM | | 1 SIM2 SIM | Option ✓ |
| SAM | | 2 SAM3 SAM | ✓ Option |
| Data Capture | Positioning Barcode reader Camera | GPS tracking 1D/2D 5M pixels autofocus | Option Option Option |
| Display | Colour | 3.5" backlit, HVGA (480x320 pixels) | ~ |
| Touchscreen | Resistive Capacitive | | √ Option |
| Keypad | | 16 keys, raised marking, backlit | ~ |
| Audio | BuzzerSpeakerAudio Jack | • Mono • Stereo | ✓ Option Option |
| Video | Video accelerator | • H264 codec | ~ |

| Thermal Printer | Speed in lines/sPaper roll cage | up to 30 lines/s 58 mm width x Ø 40 mm 58 mm width x Ø 25 mm | ✓ ✓ Option |
|--------------------------|--|---|--|
| Terminal Connectivity | • WAN • LAN • Multicom | 4G and/or 3G with fallback WiFi and/or Bluetooth WAN + LAN | Option Option Option |
| Terminal Connections | USBPower Supply | Host & SlaveDedicated power Jack | ` |
| Battery | • Li-ion | 2200mAh 3100mAh | Option ✓ |
| Terminal Size | Ø 40 mmØ 25 mm | 169x78x57 mm (6.6x3.1x2.2") 160x78x47 mm (6.3x3.1x1.9") | <i>``</i> |
| Weight | Terminal + battery | • 320 g (11 oz) | ~ |
| Security | | PCI PTS 6.online & offline certified | ~ |
| Environment | Operating temperature Storage temperature Operating humidity | -10°C to +50°C (14°F to 122°F) -20°C to +55°C (-4°F to 131°F) 85% non-condensing at +40°C (104°F) | × × × |
| Accessory | Privacy shield Car Charger Docking-station | Factory Mounted Charger 2 R\$232 USB Host USB Slave Modem Ethernet 10/100 Base T Bluetooth | Option Option Option Option Option Option Option Option |

