ingenico

LINK/2500 Integration LE

Clever payment companion designed with integration in mind





Link/2500 Integration LE brings payment acceptance anywhere in the store.


Paired with any iOS, Android or Windows-based tablet or smartphone to accept payment anywhere, anytime

Designed for integration: lightweight, slim design, as well as mechanical and electronic integration to charge and communicate with a third-party device

Power management improved and battery autonomy boosted thanks to the energy-efficient components

Compact yet robust

Raising the bar on security with PCI PTS compliancy

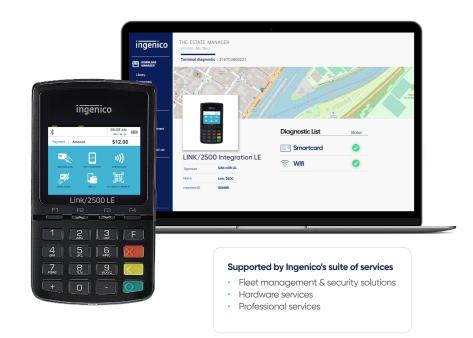

Specifications

| os | | Telium TETRA | ~ |
|--------------|--|--|-----|
| Memory | • Internal | • 256 MB Flash, 256 MB RAM | ~ |
| Processor | Application & Crypto processor | • Cortex A7 | ~ |
| Card readers | MagstripeSmart CardContactless | ISO 1/2/3, 100K lifespan EMV Level 1, 50K lifespan EMV / iSO14443 | · · |
| Display | • Colour | 2.4" colour display, backlit,QVGA (240x320 pixels) | ~ |
| Keypad | Mechanical | 20 keys, raised marking | ~ |
| Audio | Buzzer | | ~ |

| Terminal Connectivity | LAN Apple IAP Chip | Bluetooth Back connector for charging & USB data exchange Certified MFI in BT & USB | · · |
|--------------------------|---|--|---------------------------------------|
| Terminal size | • LxWxH | • 129x70x13 mm (5.07x2.75x0.51") | ~ |
| Battery | • Li-ion | • 600mAh | ~ |
| Weight | • Full featured | • 120 g (5.46 oz) | ~ |
| Security | | PCI PTS 6.x online & offline certified | ~ |
| Environment | Charging Temperature Operating Temperature Storage Temperature Operating Humidity | O°C to +40°C (32°F to 104°F) -10°C to +50°C (14°F to 122°F) -20°C to +55°C (-4°F to 131°F) 85% non-condensing at +40°C (104°F) | · · · · · · · · · · · · · · · · · · · |