## ingenico

## LINK/2500 LE Integration

Clever payment companion designed with integration in mind





## Link/2500 LE Integration brings payment acceptance anywhere in the store.


Paired with any iOS, Android or Windows-based tablet or smartphone to accept payment anywhere, anytime

Designed for integration: lightweight, slim design, as well as mechanical and electronic integration to charge and communicate with a third-party device

Power management improved and battery autonomy boosted thanks to the energy-efficient components

Compact yet robust

Raising the bar on security with PCI PTS compliancy

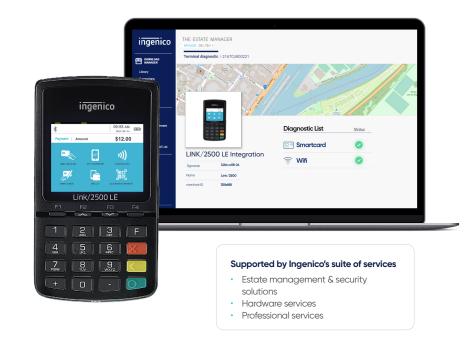

## **Specifications**

os		Telium TETRA	~
Memory	• Internal	• 256 MB Flash, 256 MB RAM	~
Processor	<ul> <li>Application</li> <li>&amp; Crypto</li> <li>processor</li> </ul>	Cortex A7	~
Card readers	<ul><li>Magstripe</li><li>Smart Card</li><li>Contactless</li></ul>	ISO 1/2/3, 100K lifespan     EMV Level 1,     50K lifespan     EMV / iSO14443	· ·
Display	• Color	<ul> <li>2.4" colour display, backlit,QVGA (240x320 pixels)</li> </ul>	~
Keypad	Mechanical	20 keys, raised marking	~
Audio	• Buzzer		~

Terminal Connectivity	<ul><li>Network</li><li>Apple IAP Chip</li></ul>	Bluetooth     Back connector for charging & USB data exchange     Certified MFI in BT & USB	· · ·
Terminal size	• LxWxH	• 5.07x2.75x0.51" (129x70x13 mm)	~
Battery	• Li-ion	• 600mAh	~
Weight	Full featured	• 5.46 oz (120 g)	~
Security		PCI PTS 6.x online     & offline certified	~
Environment	Charging Temperature Operating Temperature Storage Temperature Operating Humidity	<ul> <li>32°F to 104°F (0°C to +40°C)</li> <li>14°F to 122°F (-10°C to +50°C)</li> <li>-4°F to 131°F (-20°C to +55°C)</li> <li>85% non-condensing at +104°F (40°C)</li> </ul>	· · · · · · · · · · · · · · · · · · ·