

# AXIUM DX4000 Desktop

Exceeding expectations at the counter





Whether accept payments at counter or focus on more advanced capabilities, the AXIUM DX4000 Desktop makes it possible.

#### Maximized network availability

- · Wi-Fi, Bluetooth and optional 4G
- · Optional Ethernet through MagicBox
- Battery back-up to cover power loss

#### Seamless integration at counter


- · All-in-one compact device
- Optional MagicBox offering various wired connectivity

Raising the bar on security with PCI PTS v6 and Ingenico security tools

## Fast integrated printer

### Optimized checkout time

- EMV Chip & PIN, contactless, magstripe or digital
- Multiple alternative payment methods supported thanks to front camera
- · Highlighted contactless zone

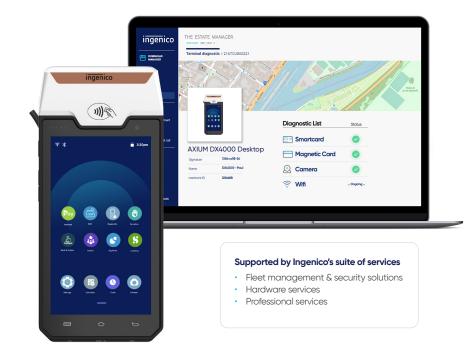

## **Specifications**

OS	Android	Android 10 Security OS	
03	Android	Android to Security OS	
Memory	<ul> <li>Internal</li> </ul>	8GB Flash 1GB RAM	~
	External	16GB Flash 2GB RAM     MicroSD Card slot	Option
	External	- Microsp Cara siot	
Processor	<ul> <li>Application</li> </ul>	Cortex Quad-core A53, 1.3GHz	~
	<ul><li>processor</li><li>Crypto processor</li></ul>	Security core SC300, 192MHz	
	Crypto processor	Security cole 3C300, 1721/1112	
Card readers	Magnetic card     reader	Support ISO 1/2/3 track data, bi-directional swiping	~
	Smart card reader	EMV L1 and support ISO7816	~
	<ul> <li>NFC/contactless</li> </ul>	EMV Contactless L1 3.1 certified;	
		support ISO / IEC 14443 Type A / B	
SAM /SIM	3 slots (SAM + SIM)	• 3 SAM	
slots		• 2 SIM + 1 SAM	Option
		• 1 SIM + 2 SAM	Option
Display	Color / capacitive	• 5", 854 x 480 px	
1, 1,	multi-touch		
Printer	Integrated	Diameter: 40mm	
	thermal printer		
Keys &	Power key	1 Power key & 2 volumes keys	~
Keypad	& volumes keys  • Capacitive	Physical screen keys: Menu,	
	screen keys	Home, Back	•

<ul><li>Speaker</li><li>Buzzer</li></ul>	Internal speaker     Internal buzzer	<b>*</b>
• WAN • LAN	<ul> <li>4G* fallback 3G and GPRS</li> <li>Bluetooth 4.2 support BLE</li> <li>WiFi IEEE8.2.11 a/b/g/n/ac, 2.4GHz and 5GHz</li> </ul>	Option  ✓
• USB	• USB Type C	~
<ul><li>Positionning**</li><li>Front camera</li></ul>	Tracking GPS, GLONASS, BEIDOU  3.3MP, fixed focus, code scanning	Option
• Li-ion	<ul> <li>2200mAh / 7.2V, 15.8Wh (equal to 4270mAh / 3.7V)</li> </ul>	~
• Ports	Ethernet, USB Host, USB device, USB C	Option
Terminal only	• 177.6 x 80 x 56.8 mm (6.63 x 3.15 x 2.15")	~
Terminal +     battery	• 435g (15.34oz)	~
• PCI	PCI PTS V6 certified	~
Operating     Temperature     Storage     Temperature     Operating     Humidity	10°C to +50°C (14°F to 122°F) 20°C to +70°C (-4°F to 158°F) - 10% to 90% non-condensing	· · · · · · · · · · · · · · · · · · ·
	• Buzzer • WAN • LAN • USB • Positionning** • Front camera • Li-ion • Ports • Terminal only • Terminal + battery • PCI • Operating Temperature • Storage Temperature • Operating	Buzzer     Internal buzzer     WAN     LAN     AG* fallback 3G and GPRS     Bluetooth 4.2 support BLE     WiFi IEEE8.2.11 a/b/g/n/ac,     2.4GHz and 5GHz      USB     USB Type C      Positionning**     Tracking GPS, GLONASS,     BEIDOU     Ternt camera     Canning     Li-ion     Canning     Ethernet, USB Host, USB device, USB C      Terminal only     Terminal + battery      PCI     PCI PTS V6 certified      Operating Temperature     Storage     Tores Tores     Canning     Terminal + Canning Temperature     Storage     Canning     Terminal + Canning Temperature     Operating     Temperature     Storage     Operating     Tores     Tores     Terminal + Canning Temperature     Storage     Terminal + Canning Temperature     Storage     Terminal + Canning Temperature     Terminal + Canning Temperature     Storage     Terminal + Canning Temperature     Temperature     Tores     Terminal + Canning Temperature     Temperature     Temperature     Tores     Temperature     Temperature

<sup>\*</sup> depending countries



<sup>\*\*</sup> with 4G version only