## ingenico

# **AXIUM SX7000**

Unleashing Android innovation for an enhanced self-service checkout





Raise the bar of security thank to Android and PCI

connectivity

certification

The AXIUM SX series delivers outstanding performance, reliability, versatile configurations, and an enriched user interface, opening the door to limitless possibilities.

#### The power of Android. Harness the power of the Appstore.

#### Ergonomic and elegant device for a smooth consumer experience

- · Large full touch display
- Presence & luminosity sensors
- User-Friendly QR Code Scanning
- · Smartphone-Like interface thanks to Android

### Support contact, contactless, and QR-code based payments, PIN on Glass certified.

#### Ruggedized

- · Designed for intensive use cases: IK09
- Indoor or outdoor: IP55
- Outdoor certified

#### **Effortless integration:**


- Frontal integration facilitated by an internally mounted plate and low depth at the back for simplified incorporation in any kiosk
- Compliant with EVA EPS (Standard Door Module) standard

#### Versatile communication and connectivity options:

 A full set of connectivity and connections (including USB, RS232, MDB, multimedia interface for external screen, Ethernet, WiFi, Bluetooth and 4G) covering most kiosk system requirements

#### Highest level of security with PCI PTS certification.

#### **Specifications**

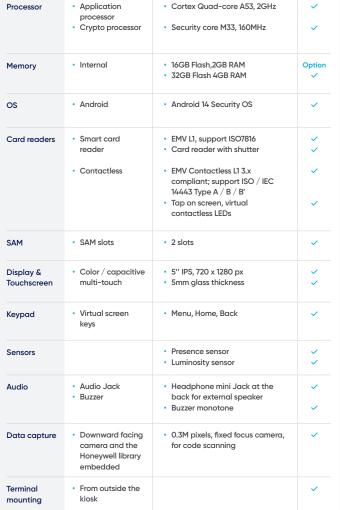



| Connectivity | <ul><li>Wired</li><li>Wireless</li></ul>   | Ethernet 10/100 base T WiFi IEEE802.11 a/b/g/n/ac 2.4G and 5G Bluetooth 5.0, support BLE 4G (1 SIM slot)  | Option                                  |
|--------------|--|---|---|
| Connections  |  | 1 USB-A Host 1 USB-C Device 1 RJ45 LAN 1 RJ11 RS232 1 MDB 4.3 Slave 1 port for second display //O isolated ports (2 inputs, 2 outputs)                            | * |
| Power supply |  | • 9-45V DC  | ~                                       |
| Size         | Overall     W x H x D mm      Installation     cutout                            | <ul> <li>110 x 146 x 57.65 mm<br/>(4.3 x 5.7 x 2.3")<br/>(31.5mm front protrusion,<br/>26.15mm kiosk depth)</li> <li>104.5 x 81 mm<br/>(26.15 mm deep)</li> </ul> | ~                                       |
|              | W x H x D (mm) • EVA EPS v2  | Standard Door Module  | ~                                       |
| Security     | • PCI  | PCI PTS V6 certified  | ~                                       |
| Ruggedized   | Outdoor certified  | CE Outdoor  | ~                                       |
| IP           | Ingress protection   | • IP55  | ~                                       |
| IK           | Shock protection   | • IK09  | ~                                       |
| Environment  | Operating     Temperature     Storage     Temperature     Operating     Humidity | 20°C to +65°C<br>(-4°F to 149°F)<br>25°C to +70°C<br>(-3°F to 158°F)<br>• up to 95% HR at +55°C<br>(+131°F), non condensing                                       | · · ·                                   |
| Accessories  | <ul><li>EVA EPS</li><li>Cables</li><li>PSU</li><li>MDB box</li></ul>             | Mounting plate     USB cables, SERIAL cables     12V DC     MDB Master + MDB Slave +  | Option<br>Option<br>Option              |



Simple EXE + Double EXE +

Audit + 2 x USB-A host